# Semester Design System

Calm, scholarly and source-aware.

COMPLETE REFERENCE

# Semester Design System

Brand book, tokens, every component with a live-rendered example, brand assets, foundations, patterns and guidelines — exported from *The Main Semester design system*.

Exported 21 Oct 2026 · Namespace `window.SemesterDesignSystem_e9f3ba` · React 18

# Contents

1. Brand book
2. Design tokens
3. Foundations
4. Brand
5. Components
6. Patterns
7. Guidelines
8. Architecture and tooling

Not included: the business, platform, strategy and handoff documents that sit alongside the system, the UI kits and templates, and anything in `archived/` or `uploads/`.

# Brand book

**Semester** is the native Student Operating System for the complete educational journey — one governed, accessible platform for a student's academic, personal, campus, financial, career and lifelong life, plus the institutional workspaces (faculty, advisor, registrar, finance, IT/security) that serve them. Surfaces include Student Today, Calendar, Tasks, Courses, Study, Write, Degree, Registration, Grades, Campus, Dining, Housing, Family, Career, Billing, Support, the AI Assistant, and the Institution Console.

The system is calm, scholarly and source-aware: near-black chrome, warm off-white content, restrained Semester blue for action and focus, and a controlled vocabulary that keeps **official, connected, personal and AI-generated** information visibly distinct.

**Status (Oct 2026):** pre-seed, founder-led, bootstrapped; first paid pilot signed with Vanderbilt University (dates not set). HECVAT Full, VPAT/ACR, SAML SSO and insurance are in progress. Large figures anywhere in this system are labelled sample data.

---

## Sources

- **Codebase (ground truth):** https://github.com/harrisonjrubin7-cmyk/semester (branch `main`). Key files read: `DESIGN-SYSTEM-GUIDE.md`, `docs/COLOR-AND-DARK-MODE-SPEC.md`, `app/src/styles/{tokens,typefaces,industry,unity}.css`, `app/src/lib/{look,status,source}.ts`, `app/src/components/{Brand,Icons,icons.data,mark.data,SourceBadge,StatusNotice,StartToday}.tsx`, `app/src/components/unity/*`, `app/src/components/console/*`. Also read: `docs/BRAND-PLATFORM.md` (voice, naming, Source Line), `enrollment/StudentRegistration.tsx`, `gradebook/StudentGrades.tsx`, `AdvisorMeeting.tsx`. Explore the repo further — especially `docs/design/`, `company-site/` and `app/src/components/` — to build closer to the real product.
- **Uploads:** `uploads/download-1.png` (lit silver logo mark on Ink), `uploads/Semester build Architecture.pdf`, `uploads/audit [...].pdf/.md` (repo audit).
- **Brief:** the user's written design direction (source-status hues, Semester blue, warm off-white content). Where it diverges from the code it is noted below.

### Reconciling brief and code

The app's own rule is "one colour for attention, the rest in words and glyphs", with a sterling/brass metal accent. The brief asks for a Semester blue action colour and distinct source hues. This system **keeps the code's grounds, type, radii, motion, glyph+word status vocabulary and contrast floors**, and **adopts the brief's palette** using hues pulled from the code's own measured ramps (Industry blue → Semester blue; Jade/Moss/Indigo/Old gold → teal/green/violet/amber). Every chip still carries a glyph and a word; colour is never the only carrier.

---

## CONTENT FUNDAMENTALS

From `docs/BRAND-PLATFORM.md` (draft) and in-app copy. **Personality:** a good registrar's assistant crossed with a precision instrument — exact, calm, candid, warm sparingly, self-possessed. **Public descriptor:** "the student action platform" ("Student OS" is internal only — it implies replacement). **Assistant name:** *Ask Semester* — no human name, face or persona; always labelled AI-assisted.

**The status sentence** (the unit of Semester voice): *what is true → what that means for you → what you can do.* "Your Canvas calendar hasn't updated since Tuesday. Deadlines below may have moved. Reconnect it, or check the course page."

**Prefer / avoid:** "helps you organise" not "revolutionises"; "alongside your school's systems" not "replaces / all-in-one"; "AI-assisted, source-linked" not "AI-powered / intelligent / magic"; name the control, never "secure / private / compliant / certified"; "planned / in private beta / pilot" not "launching soon"; "can / is designed to" not "guarantees / always / 100%"; "student" not "user / learner". Destinations are always Today, My Path, Search, Plan, Me.

**Consequence copy from the product:** "Confirming puts you on the waitlist, number 3 in line. You are not enrolled until a seat comes to you." · "You leave CHEM 101 and a W is recorded on your transcript. It cannot be undone here." · "Worked out by Semester from released grades only; your instructor's final grade is the one that counts." · "Only what you tick here can be shared. Nothing else — not your study history, grades, notes or anything else — ever is."

- **Voice:** plain, precise, quietly warm. Speaks to the student as **"you"**; the product never says "we" about itself in-UI ("Semester has not checked it with your institution"). First person only in the assistant's own answer ("I'd place them…").
- **Casing:** Sentence case everywhere — buttons, titles, chips ("Needs confirmation", "Sync trouble"). UPPERCASE only for tracked kickers/eyebrows and the wordmark.
- **Say what, why, who decides.** Every state explains itself: *"You are offline. You can keep working — 2 changes will sync when you are back."* Errors say what is safe: *"Your draft is safe on this device."*
- **Name the source.** "Institution verified", "Imported", "Student entered", "Estimated", "AI-assisted", "Needs review". Never "verified" unless it was.
- **Consequences before confirm:** What happens / Exactly what / What stays the same / Taking it back. *"This can be reversed on request: ask the Registrar before Oct 20."*
- **Respectful, not celebratory:** no streaks, ranks, exclamation marks or confetti. *"Registration submitted. Next: review your fall schedule."*
- **Never overclaim:** don't call Semester the official gradebook, registrar or payment system; label demo data "Sample".
- **Numbers:** tabular figures; dates as "Thu 9 Oct · 23:59"; middle dot `·` separates metadata.
- **Emoji:** never. Unicode glyphs are used as status marks: ◆ official, ○ yours, ✦ AI, ⇄ connected/conflict, ? review, ! attention, ✓ done, ⊘ offline, … working, ◌ sample.

## VISUAL FOUNDATIONS

- **Colour:** Ink (#090a0e family) for all chrome — rail, tab bar, console environment bar. Parchment (#f4f1ea / panel #fbf9f4) for content. Dark mode = Ink content via `[data-theme="dark"]` (tonal elevation: surfaces lighten as they rise). Semester blue 700 `#416180` is the one action/fill colour on light, 400 `#94bce3` on dark. Brass is an editorial

accent only. Source/status hues are desaturated stones, used as ink + hairline + 8% wash — never as large fills.

- **Type:** Barlow (body 16/1.55, controls 14), Barlow Condensed 600 (headings, buttons, labels, -0.015em), Cinzel (editorial display, 42–56px, rare), system mono (IDs, timestamps). Kickers: 10.5px, 0.08em tracked caps, secondary ink. Body measure ≈ 66ch.
- **Spacing:** density-aware 2px steps `--sp-1…7` (2–16px) inside components; 8px grid `--space-*` for layout. Page padding 18 / 20 / 30 by breakpoint. 44px default targets, 24px floor in crowded composites.
- **Backgrounds:** flat grounds only. No photography backgrounds, no gradients except the brushed sterling text gradient on the wordmark/chrome text. No patterns, textures or illustrations.
- **Borders & cards:** hierarchy by hairline first (9 / 16 / 34% ink), surface step second, shadow third. Cards: 1px border, 6px radius, 16px padding, no shadow, never nested. A card groups a *decision*, not a paragraph.
- **Corners:** "Drawn" 3 / 6 / 10px (control / card / sheet). Pills only for floating bars; chips are 3px.
- **Shadows:** light — ink-tinted `0 1px 2px` / `0 3px 10px` / `0 12px 32px`; dark — `--lift-1…3`. Used for floating and modal layers only.
- **Transparency & blur:** only on the tab bar and focus bar (14px blur), always with an opaque fallback under reduced transparency, increased contrast, Low stimulation and forced colours. Scrims are 50% Ink.
- **Motion:** 130ms hover/press, 180ms state change, 240ms panel, 280ms sheet; ease `cubic-bezier(.22,1,.36,1)`. Sheets rise 8px + fade. No bounce, parallax, shimmer, spinners or looping decoration. All zeroed by `prefers-reduced-motion` and `data-calm`.
- **Hover:** a blue 8% wash on buttons/rows, hairline darkens on inputs, text steps from secondary → primary. **Press:** 14% wash or one ramp step darker on primary. No scale/shrink.
- **Focus:** 2px blue-600 outline, 2px offset; selected list rows use a 3px leading edge + weight, never colour alone.
- **Imagery:** the only brand image is the lit silver mark on Ink (cool, metallic, no grain). No stock photography or AI imagery in-product.
- **Layout:** fixed dark side rail (248px) on desktop, labelled bottom tab bar on mobile, persistent system context bar with ⌘K search on top. Operational content ≤1180px; one H1 per screen.

---

## ICONOGRAPHY

- The app ships its **own inline icon set** (`app/src/components/icons.data.ts`): Lucide-like, 24×24 grid, **1.5px stroke, round caps/joins, no fills** (one exception: the favourite star fills when on). 108 glyphs, copied programmatically to `assets/icons/*.svg` and to `components/icons/iconShapes.js` for the `<Icon>` component.
- Default size 19px in rows/rails, 21px in the tab bar, 15–17px inside buttons. Always `currentColor`.
- `assets/icons-sprite.svg` is the app's public sprite; logo files: `assets/logo-horizontal(-reversed).svg`, `logo-stacked(-reversed).svg`, `logo-brass.svg`, `logo-mono-black/white.svg`, `favicon.svg`, `logo-cobrand.svg` (see Brand → Logo system), `assets/logo-mark.svg` (flat, currentColor, generated from `mark.data.ts`), `assets/logo-mark-tile.svg` / `-maskable.svg` / `-512.png` (lit silver app icons), `assets/logo-mark-silver.png` (uploaded render).
- Unicode glyphs carry status (see Content). Emoji are never used. Icon-only controls always have an accessible name. If a glyph you need is missing, use the matching **Lucide** icon at stroke-width 1.5 (CDN) and flag it.

## Components

Sources in `components/<group>/Name.jsx`; each component's guide and types in `components/<Name>/README.md` + `components/<Name>/<Name>.d.ts`, styled by `components/bundle.css`. Namespace: `window.SemesterDesignSystem_e9f3ba`.

- **core:** Button, IconButton, Icon, Wordmark (+ Mark), SectionLabel, Avatar
- **forms:** TextField, Select, Segmented, Choice, Switch, Combobox, DateField, VisibilityPicker
- **trust:** SourceBadge, SourceLine, StatusChip, ProvenanceChips, AIResponse (shared `vocabulary.js`)
- **feedback:** EmptyState, LoadingState, ErrorState, SuccessState, ProgressState, StepStatus, PermissionNotice, OfflineStrip, SaveState, Notice
- **surfaces:** ObjectCard, ContextBar, NextSteps, ActionPreview, Dialog, ScreenGuide, OpenIn, QuickActions
- **overlays:** Sheet (+ SourceDetails), UndoToast, FocusBar
- **navigation:** SideRail, TabBar, SystemContextBar, CommandPalette
- **data:** DataTable, Fields, DecisionTrail, MetricTile, ProvenanceChart
- **governance:** PolicyBadge, ConsentBadge, HealthBadge, ApprovalBanner, ErrorSummary, SupportHandoff, PageHeader

**Intentional additions** (no single source file): `AIResponse` (combines the app's AI disclosure rules into one frame), `Switch` / `Choice` (the app uses native inputs in `.visibility-choice`), `SideRail` (generalises `desk/Sidebar.tsx`), `CommandPalette` (from `unity/Combobox` styling + the brief's ⌘K), `DecisionTrail` (from `unity/DecisionTrail` + console approvals), `SourceLine` (the brand platform's proposed signature device, §2.6).

## UI kits

All views follow the codebase's seven navigation areas (`app/src/lib/navareas.ts`): **Today** (what now?), **Plan** (what's coming?), **Learn** (how do I get the work done?), **Help** (who can help?), **Campus** (what's happening, where?), **Progress** (how am I doing?), **You** (settings). Every one of the 64 destinations in `app/src/screens.tsx` appears in the student App directory; 26 are fully recreated, the rest open an outline screen with their area and primary action.

- `ui_kits/student/` — Student (desktop). Today, Notifications · Calendar, Registration, Career, Billing · Courses, Grades, Study, Ask Semester, Write, Sheets, Decks · Support, Family · Campus, Maps, Mail, Community · Me, Degree, Advising · Settings (Appearance), Connect, Privacy & data · App directory.
- `ui_kits/staff/` — Faculty gradebook, TA grading queue, Advisor, Registrar desk, Finance student accounts, Student affairs support requests.
- `ui_kits/console/` — Institution console: Overview, Approvals, Support queue, Integrations, Security operations, Audit log.
- `ui_kits/external/` — Applicant, Guardian (family portal), Alumni, Employer, Marketplace partner.
- `ui_kits/mobile/` — Phone-width app on Parchment and Ink with the five-destination tab bar.

**Audience coverage:** students ✓ · applicants ✓ · faculty ✓ · TAs ✓ · advisors ✓ · registrars ✓ · finance ✓ · student affairs ✓ · IT/security ✓ · support/ops ✓ · guardians ✓ · alumni ✓ · employers ✓ · marketplace partners ✓.

## AI Workflow Router & Benchmark Lab

- `ui_kits/workflow-lab/` — interactive prototype (Internal tools card): 6-input router with forced-v0 rules, confidence, reasons, limits, escalation, prompts, GitHub plan, Supabase prompt, MD/JSON export; sortable 16-column feature matrix; 12 canonical workflows; benchmark grid with persistence tests, persistence ceiling, 0–5 grading, weighted /5 and /100 scores, leaderboard, CSV/Markdown export. Runs are saved on this device only and labelled prototype mode.
- `handoff/workflow-router-app/` — the production app source: Next.js App Router + TypeScript strict + Tailwind + Supabase (@supabase/ssr, magic link, middleware refresh), Zod, Server Actions, export route handlers, migrations `001_core_workflow_router.sql` / `002_benchmark_grading.sql` with org-scoped RLS (owner/admin/member/viewer), `seed.sql` with the 12 workflows, honest manual adapters, persistence + source-structure probes, vitest suites and an RLS test plan. Code files carry `.txt`; run `install.sh`. Not yet typechecked, linted, tested or built.

## Master control & company site

- `ui_kits/master-control/` — the hub: product front end, console & back end, business OS, company site & marketing, design system & engineering — every kit, deck, document and hand-off one click away.
- `ui_kits/company-site/` — homepage following the brand platform: hero, “status is part of the product” map (use now / pilot / later), value props, institutions, trust (status, not certifications), footer.

## Role lens

- `ui_kits/role-lens/` — every one of the 64 screens through 14 roles (student, applicant, guardian, alumni, faculty, TA, advisor, registrar, finance, student affairs, IT/security, support, employer, partner): access level (full · scoped · shared · read · audited · none), how the screen renders for that role, and its backend (sources, tables, RLS, API). Design-level model in `roles.js`; verify against migrations.

## Business workspace

- `ui_kits/business/` — gap analysis, sortable launch tracker (56 items, CSV), 90-day roadmap, pilot/contract checklist, risk register, hiring plan, fundraising readiness; `business-data.js` is the single record. `Operating Pack.html` is the printable document.
- Decks as templates: `templates/investor-deck`, `templates/institution-deck`, `templates/internal-plan-deck`.
- Inputs: `uploads/Business Master Checklist…pdf`, `uploads/now what else…pdf`, founder answers (LLC, solo, bootstrapping, signed paid pilot with DPA/FERPA, HECVAT Full, SAML SSO, VPAT, insurance; Vercel + Supabase; AI never sees student records).

## Claude Code toolkit ( `handoff/claude-code-toolkit/` )

Repo-ready files that wire this system into Claude Code + Figma MCP without changing the app's architecture: two skills ( `audit-semester-design-sync` , `build-semester-ui` ), `.mcp.json` , `docs/FIGMA-MAPPING.md` (collections, 49 semantic + 12 primitive variables, 11 components, and this project's proposal tokens marked as *not in code*), a zero-dependency audit + report script, focused vitest proofs, and the three `design-system:*` package scripts. `PROMPTS.md` has the exact Claude Code commands. Every mapped path was checked against `app/design-tokens/semester.tokens.json` .

## Design System tab, group by group

Each group in the tab lists what it holds, where it lives, and the rule to keep.

### Foundations

- **Colors**: `guidelines/colors-*.html` , `dataviz.html` . Ink chrome, Parchment content, Semester blue 700/400, metals, source semantics on both grounds, provenance-by-pattern data viz. *Rule:* colour is never the only carrier.
- **Type**: `guidelines/type-*.html` . Barlow body, Barlow Condensed headings, Cinzel display (rare), mono for IDs. *Rule:* sentence case, 66ch measure, tabular figures.
- **Spacing**: `guidelines/spacing.html` , `archived/guidelines/radii.html` , `layout.html` , `states-interaction.html` . 2px density steps, 8px grid, corners 3/6/10, breakpoints, hover/press/focus. *Rule:* no scale or bounce on press.
- **Brand**: `components/LogoSystem/preview.html` , `components/LogoMark/preview.html` , `components/WordmarkLockup/preview.html` , `components/Iconography/preview.html` . Mark, wordmark, **logo system** (horizontal, stacked, reversed, brass, mono, favicon, co-brand lockup in `assets/logo-*.svg` ), icon set. *Rule:* Semester leads in co-brand lockups, partner logo at equal cap height, never recolour the mark.

### Components ( `components/<Name>/` , namespace `window.SemesterDesignSystem_e9f3ba` )

- **Actions**: Button, IconButton, QuickActions, ActionPreview. Primary = one per view, consequence copy before confirm.
- **AI**: AIResponse, ProvenanceChips. Always labelled AI-assisted, sources shown, human confirms the action.
- **Data**: DataTable, Fields, DecisionTrail, MetricTile, ProvenanceChart.
- **Forms**: TextField, Select, Segmented, Choice, Switch, Combobox, DateField, VisibilityPicker.
- **Glyph**: Icon, Mark, Wordmark. 1.5px stroke, `currentColor` , accessible names on icon-only controls.
- **Navigation**: SideRail, TabBar, SystemContextBar, CommandPalette (⌘K).
- **States**: Empty, Loading, Error, Success, Progress, StepStatus, Permission, Offline, SaveState, Notice, UndoToast.
- **Surfaces**: ObjectCard, ContextBar, NextSteps, Dialog, Sheet, FocusBar, ScreenGuide, OpenIn.
- **Trust & provenance**: SourceBadge, SourceLine, StatusChip. The official / connected / personal / AI distinction lives here.
- **Patterns** ( `guidelines/pattern-*.html` ): AI answer anatomy, provenance ladder, consent & sharing, consequential actions.

### Product

- **Student app**: `ui_kits/student/`. All 64 destinations across Today, Plan, Learn, Help, Campus, Progress and You, with Tweaks and live Ask Semester.
- **Mobile**: `ui_kits/mobile/`. Five-destination tab bar on Parchment and Ink.
- **Product**: `ui_kits/community/`, the community and live marketplace: feed, groups, events, Q&A, clubs and leaders, mentorship, campus marketplace with live drops, messages, privacy and safety. Campus-verified only; never touches student records.
- **Staff workspaces**: `ui_kits/staff/`. Faculty, TA, advisor, registrar, finance, student affairs.
- **Institution console**: `ui_kits/console/`. Overview, approvals, support, integrations, security, audit.
- **External audiences**: `ui_kits/external/`. Applicant, guardian, alumni, employer, marketplace partner.
- **Forms & interfaces**: `ui_kits/forms/`. 12 working forms, role capabilities, API, command and event contracts.
- **Wireframes**: `ui_kits/wireframes/`. Every screen × role in low-fi.

### Maps of the whole

- **Master control**: `ui_kits/master-control/`. The hub; every kit, deck, document and hand-off is one click away. *Rule:* every new file gets linked here.
- **Master catalog**: `ui_kits/master-catalog/`. 51 roles, 673 screens, 319 workflow steps (17 workflows), 88 systems and 82 docs, each with a status.
- **Atlas**: `ui_kits/atlas/`. Each role's features, screens and functions.
- **Maps card**: `guidelines/maps-of-the-whole.html`. **Documents card**: `guidelines/company-documents.html` (Business group). **Iconography rules**: `guidelines/iconography-rules.html` (Brand group).
- **Role lens**: `ui_kits/role-lens/`. Access level, rendering, tables, RLS and API per role × screen.

### Architecture

- **Architecture / Education OS architecture**: `ui_kits/architecture/`. OS map against legacy systems, full stack and data (20 tables), CQRS read-model pipeline, lag simulator, AI gateway, migration phases. *Rule:* the institution stays the system of record; AI never receives student records.

### Company

- **Business**: `ui_kits/business/`. Workspace (gap analysis, launch tracker, roadmap, pilot checklist, risks, hiring, fundraising), Operating Manual, Operating Pack, Market Research, Vanderbilt one-pager, invite email, campus map.
- **Operations**: `ui_kits/ops/`. 12 consoles: social media control, finance, marketing, sales and RevOps, customer success, support, trust & safety plus community and marketplace ops, legal and compliance, people, IT and security, data, partnerships. Role-gated. *Rule:* everything is labelled sample data and contains no student PII.
- **Investor**: `ui_kits/investor/`. Investor and board portal.
- **Company site**: `ui_kits/company-site/`. Home, institutions, pilot, pricing, trust, company.
- **Compliance**: `ui_kits/compliance/`. WCAG 2.2, FTC proof rules, release gate. *Rule:* state your status; never claim a certification you don't hold.

- **Product brief package**: `docs/brief/`. Index, one-pager, FAQ. Overview deck and role sheets are next.

- **Architecture cards**: `guidelines/arch-*.html` — stack layers, read-model pipeline & freshness, AI gateway, environments.

### Tooling

- **Tooling cards**: `guidelines/tooling-*.html` — Claude Code toolkit, semester-core, semester-platform, AI workflow router & benchmark lab.
- **Internal tools**: `ui_kits/workflow-lab/`, the AI workflow router and benchmark lab.
- **Tooling**: `handoff/claude-code-toolkit/`, `handoff/semester-core/`, `handoff/workflow-router-app/`. See `handoff/README.md`.

### Templates (`templates/`, entry `<Slug>.dc.html` + `ds-base.js`)

- Decks: company-deck (14 slides), investor-deck, institution-deck, internal-plan-deck.
- Screens: student-screen (rail + context bar + main/aside), console-screen (environment bar + DataTable + DecisionTrail).
- Reports: pilot results report.

---

## What's next

See `NEXT-SESSION.md` for the ordered backlog: render every missing screen, capability map, workflow runner, site operations, the full public site, personalization capabilities, formal documents, the rest of the brief package, and the PPTX exports.

---

## Index

- `styles.css` — entry; `@import`s only.
- `tokens.json` (compiled to `tokens.css`) and `components/bundle.css`; the original `tokens/` stylesheets are in `archived/tokens/`.
- `fonts/` — Barlow 400/500/700, Barlow Condensed 400/600, Cinzel (OFL).
- `assets/` — logos, app icons, `icons/` (108 SVGs), sprite.
- `guidelines/` — specimen cards (Colors, Type, Spacing, Brand, Patterns) and deep-dive docs:
- `01-provenance-and-trust.md` — the ladder, made vs AI, where cues go
- `02-ai-governance.md` — Ask Semester, AIResponse anatomy, course policy
- `03-consequential-actions.md` — undo vs preview vs two-person duty
- `04-consent-and-family.md` — default private, one decision at a time, access history
- `05-institutional-surfaces.md` — context bars, tables, authority scope
- `06-accessibility.md` — contrast, structure, reader settings, brand-exempt zones
- `07-layout-and-responsive.md` — tiers, shell, page grid, destinations
- `08-content-templates.md` — status sentence, empty/error/success, incidents, onboarding
- `components/`, `ui_kits/` — see above.

- `assets/notes/SKILL.from-standalone.md`, `github.md`, `thumbnail.html`.

**Caveats:** Atkinson Hyperlegible (the app's legibility body option) and Latin-Extended font subsets were not copied. The production app offers 13 grounds × 11 accents; only Ink and Parchment ship here.

---

## Where the system lives

- **Tokens:** `tokens.json` is the one source for colours, type, spacing, radii, shadows, sizes, layers, leading and tracking; `tokens.css` is generated from it. Values that are not tokens (the sterling gradient, calc type scales, density steps, motion) and the base and component styles are in `components/bundle.css`.
- **Components:** the bundle is `components/bundle.js` (namespace `window.SemesterDesignSystem_e9f3ba`); each component has `components/<Name>/README.md`, `<Name>.d.ts` and a live `preview.html`; all types together are in `components/index.d.ts`.
- **Moved aside:** the old stylesheets, the original `_ds_bundle.js`, group cards, `_ds_manifest.json` and specimen pages now covered by tokens are in `archived/`.

# Design tokens

Content defaults to Parchment; [data-theme="dark"] flips content to Ink. Chrome (rail, tab bar, console header) is always Ink. Source and status hues always travel with a word and a glyph.

## Colour — primitives

| | TOKEN | VALUE | USAGE |
|---|---|---|---|
| | `ink-void` | `#040507` | Ink ground ramp: near-black, cooled. Default dark ground and always-dark chrome. |
| | `ink-bg` | `#090a0e` | Ink ground ramp: near-black, cooled. Default dark ground and always-dark chrome. |
| | `ink-panel` | `#12141a` | Ink ground ramp: near-black, cooled. Default dark ground and always-dark chrome. |
| | `ink-hero` | `#191c23` | Ink ground ramp: near-black, cooled. Default dark ground and always-dark chrome. |
| | `ink-raise` | `#22262f` | Ink ground ramp: near-black, cooled. Default dark ground and always-dark chrome. |
| | `ink-fg` | `#eceef2` | Ink ground ramp: near-black, cooled. Default dark ground and always-dark chrome. |
| | `parchment-void` | `#e8e4dc` | Parchment ground ramp: warm off-white. Default light content ground. |
| | `parchment-bg` | `#f4f1ea` | Parchment ground ramp: warm off-white. Default light content ground. |
| | `parchment-panel` | `#fbf9f4` | Parchment ground ramp: warm off-white. Default light content ground. |
| | `parchment-hero` | `#ffffff` | Parchment ground ramp: warm off-white. Default light content ground. |
| | `parchment-raise` | `#ffffff` | Parchment ground ramp: warm off-white. Default light content ground. |
| | `parchment-fg` | `#1b1a17` | Parchment ground ramp: warm off-white. Default light content ground. |
| | `graphite-bg` | `#16181c` | Graphite: alternate dark ground. |
| | `graphite-panel` | `#1f2229` | Graphite: alternate dark ground. |
| | `graphite-raise` | `#333843` | Graphite: alternate dark ground. |
| | `sterling` | `#d4d9e2` | Semester color. |
| | `sterling-bright` | `#f6f8fb` | Sterling metal, for the mark and chrome highlights. |
| | `sterling-deep` | `#9ca3b2` | Sterling metal, for the mark and chrome highlights. |
| | `sterling-shade` | `#4c5561` | Sterling metal, for the mark and chrome highlights. |
| | `brass` | `#d8c79a` | Semester color. |

| | TOKEN | VALUE | USAGE |
|---|---|---|---|
| | `brass-bright` | `#f2e7c8` | Brass metal, for editorial accents. |
| | `brass-deep` | `#b09f76` | Brass metal, for editorial accents. |
| | `brass-shade` | `#695a33` | Brass metal, for editorial accents. |
| | `blue-100` | `#eef6ff` | Semester blue (the Industry ramp): interactive focus and trust. |
| | `blue-200` | `#d6ebff` | Semester blue (the Industry ramp): interactive focus and trust. |
| | `blue-300` | `#b5d9fd` | Semester blue (the Industry ramp): interactive focus and trust. |
| | `blue-400` | `#94bce3` | Semester blue (the Industry ramp): interactive focus and trust. |
| | `blue-500` | `#749dc4` | Semester blue (the Industry ramp): interactive focus and trust. |
| | `blue-600` | `#597ea3` | Semester blue (the Industry ramp): interactive focus and trust. |
| | `blue-700` | `#416180` | Semester blue (the Industry ramp): interactive focus and trust. |
| | `blue-800` | `#2c455d` | Semester blue (the Industry ramp): interactive focus and trust. |
| | `blue-900` | `#1d2d3d` | Semester blue (the Industry ramp): interactive focus and trust. |
| | `neutral-100` | `#f5f5f8` | Industry neutral ramp. |
| | `neutral-200` | `#e7e7ea` | Industry neutral ramp. |
| | `neutral-300` | `#d4d4d7` | Industry neutral ramp. |
| | `neutral-400` | `#b7b7ba` | Industry neutral ramp. |
| | `neutral-500` | `#98989b` | Industry neutral ramp. |
| | `neutral-600` | `#7a7a7d` | Industry neutral ramp. |
| | `neutral-700` | `#5d5d60` | Industry neutral ramp. |
| | `neutral-800` | `#424244` | Industry neutral ramp. |
| | `neutral-900` | `#2b2b2d` | Industry neutral ramp. |
| | `official-ink` | `#2c455d` | Official status primitive: text on light grounds. |
| | `official-tint` | `#b5d9fd` | Official status primitive: text on dark grounds. |
| | `connected-ink` | `#2d5c61` | Connected status primitive: text on light grounds. |
| | `connected-tint` | `#9fcbcd` | Connected status primitive: text on dark grounds. |
| | `personal-ink` | `#4a4b4f` | Personal status primitive: text on light grounds. |
| | `personal-tint` | `#b9b9bd` | Personal status primitive: text on dark grounds. |
| | `ai-ink` | `#544a7f` | Ai status primitive: text on light grounds. |
| | `ai-tint` | `#bcb2df` | Ai status primitive: text on dark grounds. |

| | TOKEN | VALUE | USAGE |
|---|---|---|---|
| | `pending-ink` | `#7a5310` | Pending status primitive: text on light grounds. |
| | `pending-tint` | `#e2c27a` | Pending status primitive: text on dark grounds. |
| | `risk-ink` | `#a3301f` | Risk status primitive: text on light grounds. |
| | `risk-tint` | `#f0907a` | Risk status primitive: text on dark grounds. |
| | `success-ink` | `#3e6141` | Success status primitive: text on light grounds. |
| | `success-tint` | `#a9c9a3` | Success status primitive: text on dark grounds. |
| | `chrome-text-secondary` | `rgba(236,238,242,.64)` | Chrome (rail, tab bar, console bar): always dark. |
| | `chrome-line` | `rgba(236,238,242,.10)` | Chrome (rail, tab bar, console bar): always dark. |
| | `chrome-active` | `rgba(148,188,227,.14)` | Chrome (rail, tab bar, console bar): always dark. |
| | `scrim` | `rgba(4,5,7,.5)` | Backdrop behind sheets and dialogs. |

## Colour — semantic (light · dark)

| LIGHT · DARK | TOKEN | LIGHT | DARK | USAGE |
|---|---|---|---|---|
| | `surface-sunken` | `{parchment-void}` | `{ink-void}` | Wells and recessed areas below the canvas. |
| | `surface-canvas` | `{parchment-bg}` | `{ink-bg}` | Page background. |
| | `surface-base` | `{parchment-panel}` | `{ink-panel}` | Panels and cards on the canvas. |
| | `surface-quiet` | `#f1ede4` | `#161820` | Quiet fills: hover rows, secondary panels. |
| | `surface-raised` | `{parchment-hero}` | `{ink-hero}` | Raised surfaces: inputs, popovers, hero cards. |
| | `surface-overlay` | `{parchment-raise}` | `{ink-raise}` | Overlays: menus, sheets, dialogs. |
| | `text-primary` | `{parchment-fg}` | `{ink-fg}` | Body and heading text on every surface-* token. |
| | `text-secondary` | `rgba(27,26,23,.68)` | `rgba(236,238,242,.64)` | Supporting text on surface-canvas, surface-base and surface-raised. |
| | `text-tertiary` | `rgba(27,26,23,.52)` | `rgba(236,238,242,.42)` | Placeholders and least-important meta text. Contrast note: about 3.4–3.7:1 on the surfaces in both themes, below 4.5:1 for body text; keep it to large text (24px+) or non-essential hints, and use text-secondary for anything a person must read. |
| | `text-disabled` | `rgba(27,26,23,.52)` | `rgba(236,238,242,.42)` | Disabled control text. |
| | `text-on-action` | `#ffffff` | `#08090c` | Text on action-primary fills. |

| LIGHT · DARK | TOKEN | LIGHT | DARK | USAGE |
|---|---|---|---|---|
| | `text-link` | {blue-700} | {blue-300} | Inline links on surface-* grounds. |
| | `border-subtle` | rgba(27,26,23,.09) | rgba(236,238,242,.08) | Hairline dividers. |
| | `border-default` | rgba(27,26,23,.16) | rgba(236,238,242,.14) | Default control and card borders. |
| | `border-strong` | rgba(27,26,23,.34) | rgba(236,238,242,.30) | Hover borders and emphasized edges. |
| | `action-primary` | {blue-700} | {blue-400} | Primary button fill; one per decision region. |
| | `action-primary-hover` | {blue-800} | {blue-300} | Primary button hover. |
| | `action-primary-press` | {blue-900} | {blue-500} | Primary button pressed. |
| | `action-secondary` | rgba(65,97,128,.08) | rgba(148,188,227,.10) | Secondary button hover wash. |
| | `action-secondary-hover` | rgba(65,97,128,.14) | rgba(148,188,227,.18) | Secondary button pressed wash. |
| | `focus-color` | {blue-600} | {blue-400} | Focus ring on every interactive element. |
| | `accent-editorial` | {brass-shade} | {brass} | Editorial accent (kickers, rules) in brand moments. |
| | `source-official` | {official-ink} | {official-tint} | Text and glyph color for the official source state. Every state also carries a word and a glyph. |
| | `source-official-line` | rgba(44,69,93,.45) | rgba(181,217,253,.40) | Border for the official source state. Every state also carries a word and a glyph. |
| | `source-official-wash` | rgba(44,69,93,.08) | rgba(181,217,253,.08) | Background wash for the official source state. Every state also carries a word and a glyph. |
| | `source-connected` | {connected-ink} | {connected-tint} | Text and glyph color for the connected source state. Every state also carries a word and a glyph. |
| | `source-connected-line` | rgba(45,92,97,.45) | rgba(159,203,205,.40) | Border for the connected source state. Every state also carries a word and a glyph. |
| | `source-connected-wash` | rgba(45,92,97,.08) | rgba(159,203,205,.08) | Background wash for the connected source state. Every state also carries a word and a glyph. |
| | `source-personal` | {personal-ink} | {personal-tint} | Text and glyph color for the personal source state. Every state also carries a word and a glyph. |
| | `source-personal-line` | rgba(74,75,79,.40) | rgba(185,185,189,.34) | Border for the personal source state. Every state also carries a word and a glyph. |
| | `source-personal-wash` | rgba(74,75,79,.06) | rgba(185,185,189,.06) | Background wash for the personal source state. Every state also carries a word and a glyph. |

| LIGHT · DARK | TOKEN | LIGHT | DARK | USAGE |
|---|---|---|---|---|
| | `source-ai` | {ai-ink} | {ai-tint} | Text and glyph color for the ai source state. Every state also carries a word and a glyph. |
| | `source-ai-line` | rgba(84,74,127,.45) | rgba(188,178,223,.42) | Border for the ai source state. Every state also carries a word and a glyph. |
| | `source-ai-wash` | rgba(84,74,127,.08) | rgba(188,178,223,.09) | Background wash for the ai source state. Every state also carries a word and a glyph. |
| | `status-pending` | {pending-ink} | {pending-tint} | Text and glyph color for the pending status state. Every state also carries a word and a glyph. |
| | `status-pending-line` | rgba(160,112,24,.50) | rgba(226,194,122,.45) | Border for the pending status state. Every state also carries a word and a glyph. |
| | `status-pending-wash` | rgba(196,146,48,.12) | rgba(226,194,122,.09) | Background wash for the pending status state. Every state also carries a word and a glyph. |
| | `status-danger` | {risk-ink} | {risk-tint} | Text and glyph color for the danger status state. Every state also carries a word and a glyph. |
| | `status-danger-line` | rgba(163,48,31,.45) | rgba(240,144,122,.45) | Border for the danger status state. Every state also carries a word and a glyph. |
| | `status-danger-wash` | rgba(163,48,31,.08) | rgba(240,144,122,.09) | Background wash for the danger status state. Every state also carries a word and a glyph. |
| | `status-success` | {success-ink} | {success-tint} | Text and glyph color for the success status state. Every state also carries a word and a glyph. |
| | `status-success-line` | rgba(62,97,65,.45) | rgba(169,201,163,.42) | Border for the success status state. Every state also carries a word and a glyph. |
| | `status-success-wash` | rgba(62,97,65,.08) | rgba(169,201,163,.08) | Background wash for the success status state. Every state also carries a word and a glyph. |
| | `status-neutral` | {text-secondary} | {text-secondary} | Text and glyph color for the neutral status state. Every state also carries a word and a glyph. |
| | `chrome-surface` | {ink-bg} | {ink-bg} | Chrome (rail, tab bar, console bar): always dark. |
| | `chrome-surface-raised` | {ink-panel} | {ink-panel} | Chrome (rail, tab bar, console bar): always dark. |
| | `chrome-text` | {ink-fg} | {ink-fg} | Chrome (rail, tab bar, console bar): always dark. |
| | `brand-canvas` | {surface-canvas} | {surface-canvas} | Brand role shared with the company site. |
| | `brand-surface` | {surface-base} | {surface-base} | Brand role shared with the company site. |

| LIGHT · DARK | TOKEN | LIGHT | DARK | USAGE |
|---|---|---|---|---|
| | `brand-ink` | `{text-primary}` | `{text-primary}` | Brand role shared with the company site. |
| | `brand-muted` | `{text-secondary}` | `{text-secondary}` | Brand role shared with the company site. |
| | `brand-accent` | `{action-primary}` | `{action-primary}` | Brand role shared with the company site. |
| | `brand-focus` | `{focus-color}` | `{focus-color}` | Brand role shared with the company site. |

## Typography

Barlow for product reading, Barlow Condensed for headings, labels and controls, Cinzel for editorial display moments only, system mono for identifiers and timestamps. Sizes scale with —text-scale (see components/bundle.css).

| FAMILY | STACK |
|---|---|
| `display` | 'Cinzel','Barlow Condensed',Georgia,serif |
| `heading` | 'Barlow Condensed',system-ui,sans-serif |
| `body` | 'Barlow',system-ui,sans-serif |
| `mono` | `ui-monospace,'SF Mono',Menlo,Consolas,monospace` |

| FONT FILE | FAMILY | WEIGHT |
|---|---|---|
| `fonts/Barlow-400-latin.woff2` | Barlow | 400 |
| `fonts/Barlow-500-latin.woff2` | Barlow | 500 |
| `fonts/Barlow-700-latin.woff2` | Barlow | 700 |
| `fonts/BarlowCondensed-400-latin.woff2` | Barlow Condensed | 400 |
| `fonts/BarlowCondensed-600-latin.woff2` | Barlow Condensed | 600 |
| `fonts/Cinzel-latin.woff2` | Cinzel | 400 600 |

### Roles

`role-editorial` · 42px / 1.1 · 500 · display
Editorial headlines on the company site; Cinzel moments only.

# Your lab report is due Thursday

`role-display` · 26px / 1.15 · 600 · heading
Display numbers and hero headings in product.

## Your lab report is due Thursday

`role-page` · 24px / 1.2 · 600 · heading

Page titles (h1).

# Your lab report is due Thursday

`role-section` · 20px / 1.2 · 600 · heading

Section headings (h2).

## Your lab report is due Thursday

`role-card-title` · 18px / 1.25 · 600 · heading

Card titles.

### Your lab report is due Thursday

`role-body` · 16px / 1.55 · 400 · body

Body copy.

Your lab report is due Thursday

`role-control` · 14px / 1.2 · 600 · heading

Button and control labels.

**Your lab report is due Thursday**

`role-compact` · 12px / 1.45 · 400 · body

Dense rows and compact UI.

Your lab report is due Thursday

`role-label` · 11px / 1.3 · 500 · body

Field labels and meta.

Your lab report is due Thursday

`role-caption` · 11px / 1.45 · 400 · body

Captions.

Your lab report is due Thursday

`role-kicker` · 10.5px / 1.3 · 500 · body

Uppercase kickers above headings.

Your lab report is due Thursday

`role-numeric` · 22px / 1.15 · 600 · heading

Metric values (tabular numerals).

# Your lab report is due Thursday

## Spacing

8px macro grid. The density-aware —sp-1…7 steps stay in components/bundle.css (they multiply by —density).

| TOKEN | VALUE | USAGE |
|---|---|---|
| `space-1` | 8px | 8px macro grid for layout gaps and section spacing. |

| TOKEN | VALUE | USAGE |
|---|---|---|
| space-2 | 16px | 8px macro grid for layout gaps and section spacing. |
| space-3 | 24px | 8px macro grid for layout gaps and section spacing. |
| space-4 | 32px | 8px macro grid for layout gaps and section spacing. |
| space-5 | 40px | 8px macro grid for layout gaps and section spacing. |
| space-6 | 48px | 8px macro grid for layout gaps and section spacing. |
| space-8 | 64px | 8px macro grid for layout gaps and section spacing. |
| space-10 | 80px | 8px macro grid for layout gaps and section spacing. |
| space-12 | 96px | 8px macro grid for layout gaps and section spacing. |
| page-pad | 18px | Page and chrome padding at narrow widths; widens at 760px and 1100px. |
| chrome-pad | 18px | Page and chrome padding at narrow widths; widens at 760px and 1100px. |

## Radius

"Drawn" corners, the app default.

| TOKEN | VALUE | USAGE |
|---|---|---|
| r-sm | 3px | Drawn corners: controls. |
| r-md | 6px | Drawn corners: cards. |
| r-lg | 10px | Drawn corners: surfaces and sheets. |
| shape-pill | 999px | Pills and chips. |

## Shadow

Border first, shadow second.

| TOKEN | VALUE | USAGE |
|---|---|---|
| lift-1 | 0 1px 2px rgba(0,0,0,.4) | Lift on dark grounds. Border first, shadow second. |
| lift-2 | 0 1px 2px rgba(0,0,0,.45),0 6px 18px rgba(0,0,0,.35) | Lift on dark grounds. Border first, shadow second. |
| lift-3 | 0 1px 3px rgba(0,0,0,.5),0 12px 36px rgba(0,0,0,.5) | Lift on dark grounds. Border first, shadow second. |

| TOKEN | VALUE | | USAGE |
|---|---|---|---|
| `shadow-sm` | `0 1px 2px rgba(43,43,45,.14)` |  | Ink-tinted shadow on light grounds. Border first, shadow second. |
| `shadow-md` | `0 3px 10px rgba(43,43,45,.16)` |  | Ink-tinted shadow on light grounds. Border first, shadow second. |
| `shadow-lg` | `0 12px 32px rgba(43,43,45,.22)` |  | Ink-tinted shadow on light grounds. Border first, shadow second. |

## Sizes and targets

| TOKEN | VALUE | USAGE |
|---|---|---|
| `rail-w` | `248px` | Side rail width. |
| `rail-w-compact` | `72px` | Collapsed side rail width. |
| `layout-measure` | `100%` | Default content measure. |
| `layout-operational` | `1180px` | Max width of operational (console) pages. |
| `target-min` | `24px` | Smallest hit target. |
| `target-compact` | `32px` | Compact control height (dense rows). |
| `target-icon` | `40px` | Icon button size. |
| `target-primary` | `44px` | Standard control height. |
| `focus-ring-width` | `2px` | Focus outline width. |
| `focus-ring-offset` | `2px` | Focus outline offset. |
| `blur-chrome` | `14px` | Backdrop blur behind translucent chrome. |

## Layers (z-index)

| TOKEN | VALUE | USAGE |
|---|---|---|
| `layer-base` | `0` | Stacking order: base. |
| `layer-raised` | `1` | Stacking order: raised. |
| `layer-sticky` | `20` | Stacking order: sticky. |
| `layer-chrome` | `21` | Stacking order: chrome. |
| `layer-overlay` | `80` | Stacking order: overlay. |
| `layer-menu` | `90` | Stacking order: menu. |
| `layer-skip` | `100` | Stacking order: skip. |
| `layer-curtain` | `1500` | Stacking order: curtain. |

## Leading (line height)

| TOKEN | VALUE | USAGE |
|---|---|---|
| `leading-none` | `1` | Line height: none. |
| `leading-display-xl` | `1.08` | Line height: display-xl. |
| `leading-display-lg` | `1.1` | Line height: display-lg. |
| `leading-display` | `1.15` | Line height: display. |
| `leading-display-sm` | `1.2` | Line height: display-sm. |
| `leading-display-xs` | `1.25` | Line height: display-xs. |
| `leading-tight` | `1.3` | Line height: tight. |
| `leading-tight-plus` | `1.35` | Line height: tight-plus. |
| `leading-normal` | `1.45` | Line height: normal. |
| `leading-relaxed` | `1.5` | Line height: relaxed. |
| `leading-relaxed-plus` | `1.55` | Line height: relaxed-plus. |
| `leading-loose` | `1.6` | Line height: loose. |


## Tracking (letter spacing)

| TOKEN | VALUE | USAGE |
|---|---|---|
| `tracking-heading` | `-0.015em` | Heading letter spacing. |
| `tracking-kicker` | `0.08em` | Kicker (uppercase label) letter spacing. |
| `tracking-caps` | `0.1em` | All-caps letter spacing. |
| `tracking-wordmark` | `0.22em` | Wordmark letter spacing. |

# Foundations


## All 13 grounds (reader setting)

The app lets each reader choose a ground; this system ships Ink + Parchment

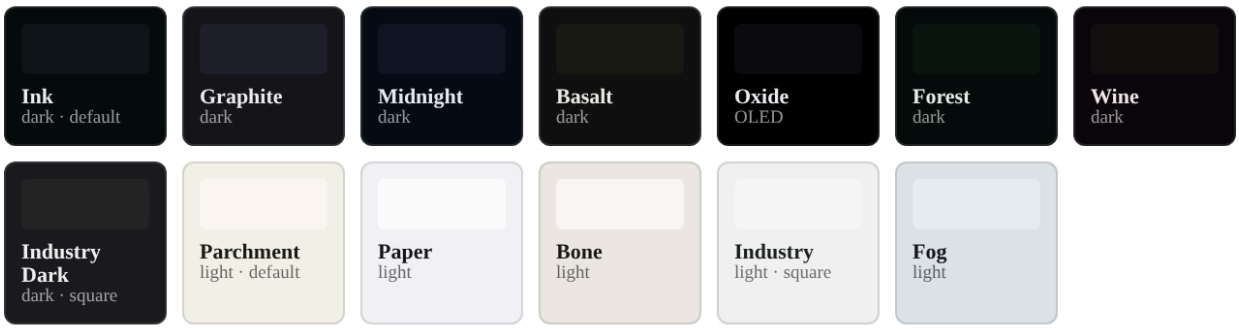


## The 11 metal accents

base (on dark) and shade (text on light) — desaturated metals and stones




Industry → Semester blue in this system. Accent colours identify courses and action; they never encode success or error.

## Metals

Sterling (wordmark/chrome), Brass (editorial accent)



## Components on Ink

The same components with [data-theme=

!Assignment · Action required

**Lab report 3: Enzyme kinetics**

◆Official · BIO 210Institution verified by BIO 210

Due Thu 9 Oct · 23:59

Open draft View rubric

Submit Save draft

✦AI-assistedWritten with Semester's assistant. It is not an official answer — check anything you act on.

⇄ConnectedSynced from a connected account or feed. Semester has not checked it with your institution.

!Hold on account

⊘You are offline. You can keep working — 2 changes will sync when you are

## Data visualisation encoding

Provenance by pattern: solid, outline, hatched, dotted — survives greyscale

Official / connected
data-enc="solid"

Yours
data-enc="outline"

Estimated / AI-derived
data-enc="hatched"

Out of date
data-enc="dotted"

## Full type scale

Every —type-* step with its job; all × —text-scale

| | | |
|---|---|---|
| --type-2xl | 28px | The figure a screen is about |
| --type-xl | 26px | The one heading on a screen |
| --type-display-lg | 24px | Screen title |
| --type-display | 22px | Figure read at a glance |
| --type-display-sm | 20px | Section heading |
| --type-display-xs | 19px | Card or item title |
| --type-lg | 18px | A card’s own title |
| --type-md | 17px | List rows, the thing you tap |
| --type-base | 16px | Body |
| --type-control | 14px | Inputs and buttons |
| --type-sm-plus | 12.5px | A caption with something to say |
| --type-sm | 12px | Captions, second-rank prose |
| --type-xs | 11px | Labels, kickers, meta |
| --type-2xs-plus | 10.5px | Caps kicker over a section |

## Editorial display — Cinzel

Major statements and editorial moments only

# The whole of the semester.

Fall Term · Northfield University

--font-display · Cinzel 400–600 · 42–56px · leading 1.08

## Headings — Barlow Condensed

Page, section, card, and control labels

| | |
|---|---|
| Page title · 24 | **Today, Tuesday 7 October** |
| Display · 26 | **Degree progress** |
| Section · 20 | **This week in BIO 210** |
| Card · 18 | **Registration opens tomorrow** |

## Body — Barlow

Product reading, forms, operational text

Body 16 / 1.55. Your lab report is due Thursday. The methods section is drafted; results and discussion remain. Start with the data table — it is the part the rubric weighs most.

Row 17 — the thing you tap

Control 14 — inputs & buttons

Caption 12 — second-rank prose

Meta 11 — labels and timestamps

## Kickers, numerals & mono

Caps kickers, tabular figures, identifiers

Official · Updated today

Begin today

**3.62** GPA · 94 / 120 cr

req_7Hk2Q9

2026-10-03 14:02 UTC

## Spacing scales

Density-aware 2px steps for UI · 8px grid for layout

| | |
|---|---|
| sp-1 | 2px |
| sp-2 | 4px |
| sp-3 | 6px |
| sp-4 | 8px |
| sp-5 | 10px |
| sp-6 | 12px |
| sp-7 | 16px |

| | |
|---|---|
| space-1 | 8px |
| space-2 | 16px |
| space-3 | 24px |
| space-4 | 32px |
| space-6 | 48px |
| space-8 | 64px |

## Density settings

Comfortable 1 · Snug .86 · Tight .74 — scales the 2px steps, never targets

COMFORTABLE · 1

Assignment
Lab report 3

Due Thu · 23:59

SNUG · 0.86

Assignment
Lab report 3

Due Thu · 23:59

TIGHT · 0.74

Assignment
Lab report 3

Due Thu · 23:59

## Layout & breakpoints

Rail + context bar + content; page padding by tier




| | |
|---|---|
| <760 | Tab bar · page-pad 18 · rail 0 |
| 760–1099 | Compact rail 72 · pad 20 |
| ≥1100 | Rail 248 · pad 30 |
| READING | 66ch measure |
| OPS MAX | 1180px |

## Motion


Role durations · zeroed by reduced motion and Less motion

| fast | standard | slow | sheet | progress |
|---|---|---|---|---|
| 130ms | 180ms | 240ms | 280ms | 180ms linear |
| hover, press | save, insert | panel | sheet, dialog | progress |

ease cubic-bezier(.22,1,.36,1) · emphasized (.2,.8,.2,1) · no bounces, no parallax, no looping decoration

## Interaction states

Rest, hover, press, focus, disabled — no scale, no bounce

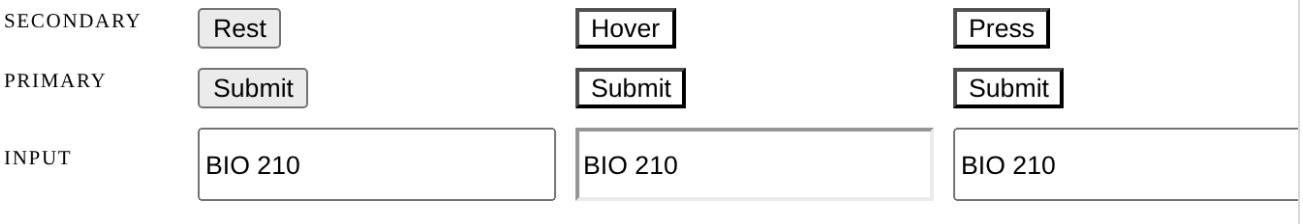



Hover = 8% blue wash · Press = 14% / one ramp step darker · Focus = 2px blue-600 ring, 2px offset · Disabled = 45% opacity + not-allow

# Brand


## Logo system

Horizontal, stacked, mono, reversed, favicon, co-brand

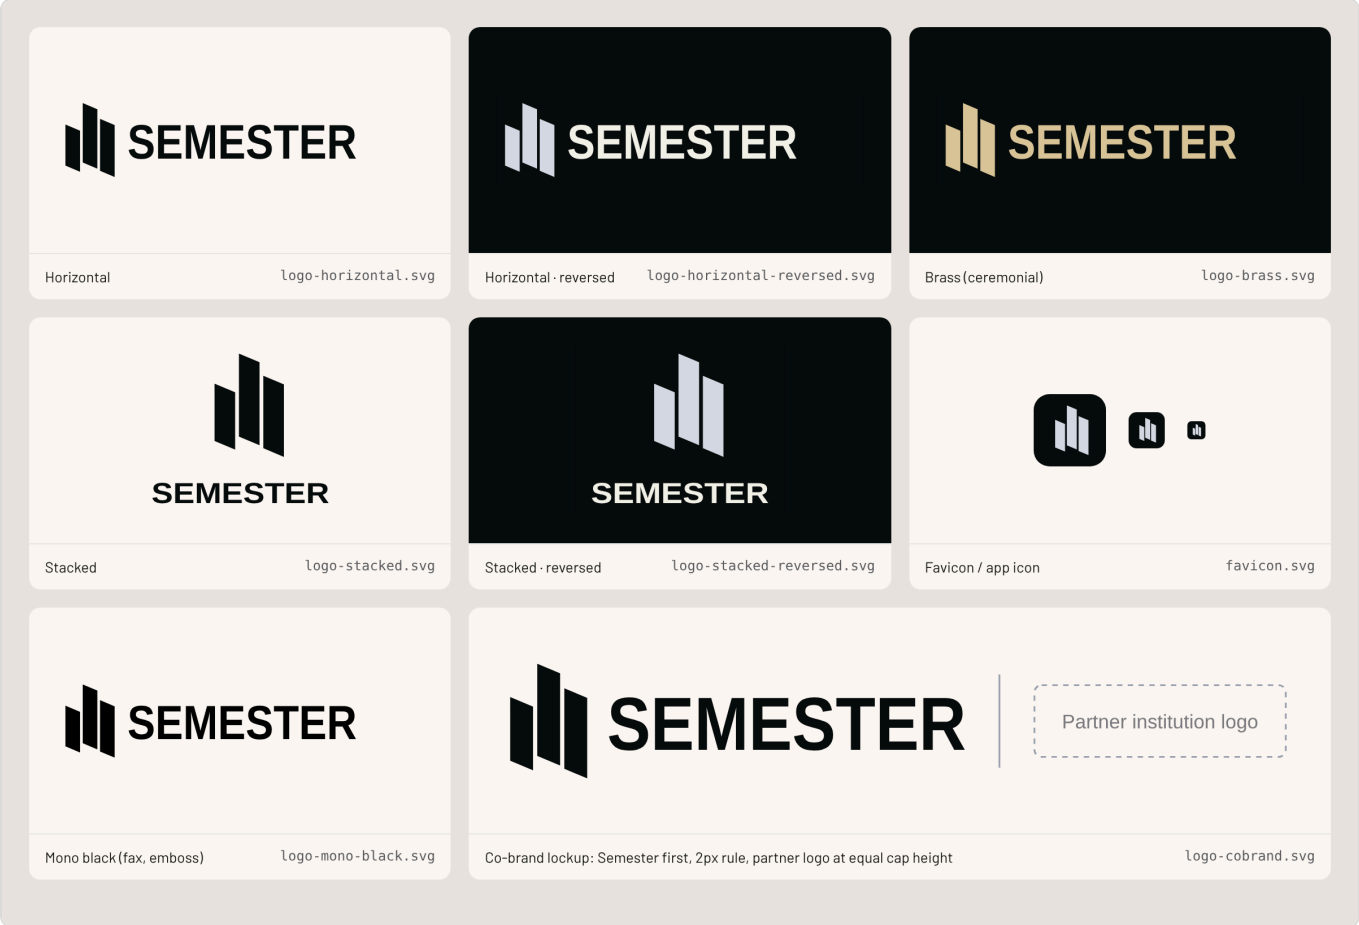


## Logo mark


Three slabs — a term rising, cresting, running out

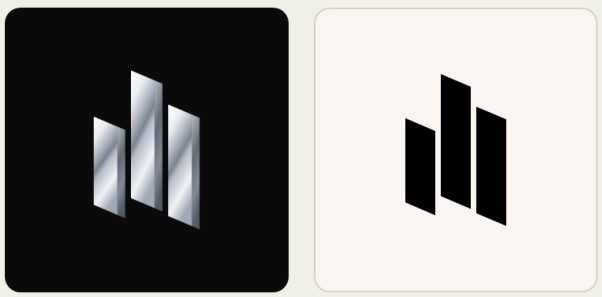

Lit silver on Ink for app icons and splash; flat currentColor everywhere in-app so it follows the ground. Never recolour into the accent, add glow, or place on photography.


## Wordmark lockup

Mark + SEMESTER in Barlow Condensed, tracked

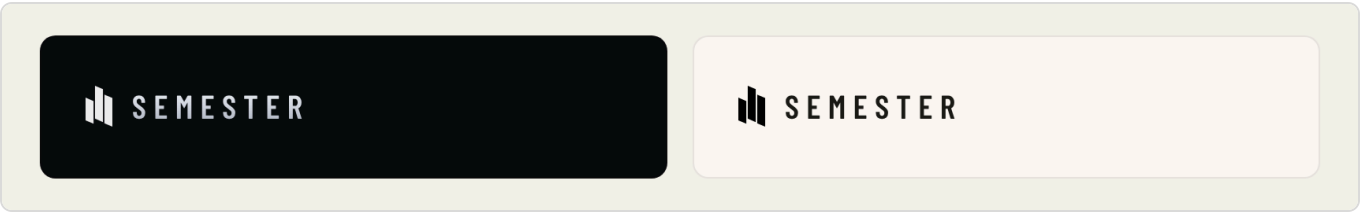


## Iconography

Lucide-like, 24 grid, 1.5 stroke, round caps — the app's own set

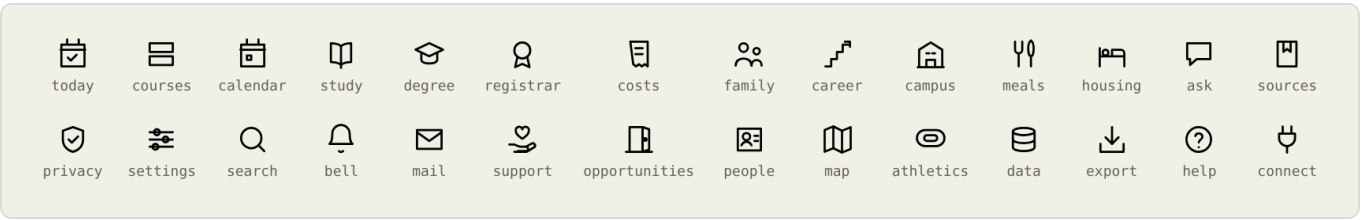


## Iconography rules

Sizes, stroke, colour, accessible names, status glyphs, files

### Sizes

15px 17px 19px 21px

15–17 in buttons · 19 in rows and rails · 21 in the tab bar

### Drawing

24×24 grid, 1.5px stroke, round caps and joins, no fills (favourite star fills when on). Always currentColor. 108 glyphs.

Missing glyph
Matching Lucide icon at stroke 1.5, flagged

### Status glyphs

◆ official ○ yours ✦ AI

⇄ connected ? review ! attention

✓ done ⊘ offline … working ◌

sample

No emoji. Icon-only controls always have an accessible name.

## Voice — prefer / avoid

From docs/BRAND-PLATFORM.md §1.7

| | |
|---|---|
| ✓ helps you organise · turns … into | ✕ revolutionises · transforms · supercharge |
| ✓ alongside your school’s systems | ✕ replaces · all-in-one · everything school |
| ✓ AI-assisted, source-linked · Ask Semester | ✕ AI-powered · intelligent · knows you · magic |
| ✓ built with controls for [named control] | ✕ secure · private · compliant · certified |
| ✓ planned · in private beta · in a pilot | ✕ launching soon · coming Spring |
| ✓ can · is designed to | ✕ guarantees · always · never fails · 100% |
| ✓ student | ✕ user · learner |
| ✓ Your Canvas calendar hasn’t updated since Tuesday. Deadlines may have moved. Reconnect it. | ✕ Oops! Something went wrong 😕 |


5 · LIVE-RENDERED EXAMPLES

# Components

Every component in `components/bundle.js`, rendered from its preview. Each entry gives its guide (README.md) and its props (from `components/index.d.ts`).

# Actions

## ActionPreview

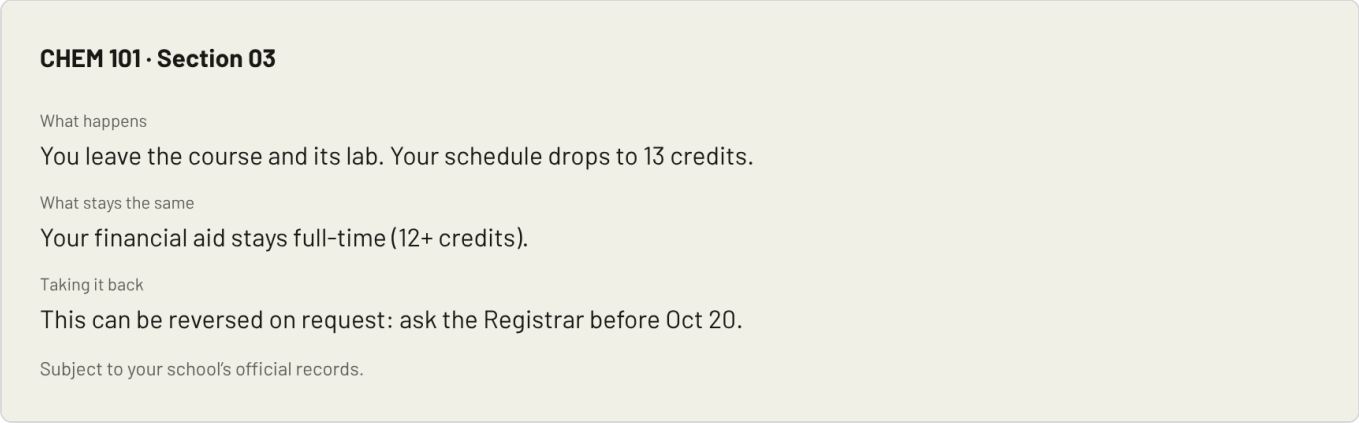


What is about to happen, said before it happens — What happens / Exactly what / What stays / Taking it back.


```
<ActionPreview subject="Drop CHEM 101" says="You leave the course and its waitlist." recovery=
{{kind:"request",how:"ask the Registrar before Oct 20."}} />
```

Put inside Dialog for consequential, irreversible or financial actions.

PROPS

```
import * as React from 'react';
/**
 * What is about to happen, said before it happens — What happens / Exactly what / What stays / Taking it back.
 */
export interface ActionPreviewProps { subject?: string; says: React.ReactNode; exactly?: React.ReactNode;
doesNotChange?: React.ReactNode; recovery: { kind: "undo" | "request" | "none"; how?: string }; subjectTo?:
React.ReactNode; provenance?: React.ReactNode; }
export declare function ActionPreview(props: ActionPreviewProps): JSX.Element;
```

## Button

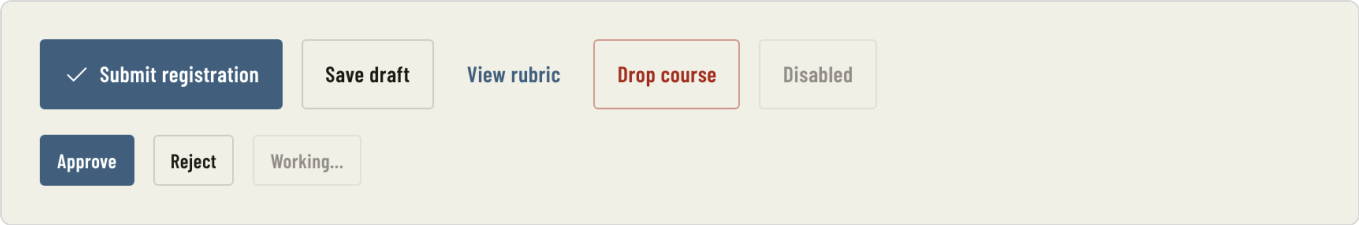


Action button — one primary per decision region; 44px tall by default, condensed-caps-free label in Barlow Condensed 600.

```
<Button variant="primary" icon="check">Submit registration</Button>
```

primary (Semester blue fill), secondary (hairline), ghost (text), danger (red ink, hairline — never a red fill). size="sm" = 32px for dense rows.

PROPS

```
import * as React from 'react';
/**
 * Action button — one primary per decision region; 44px tall by default, condensed-caps-free label in Barlow
Condensed 600.
 * @startingPoint section="Actions" subtitle="Action button — one primary per decision region; 44px tall by
default, condensed" viewport="700x400"
 */
export interface ButtonProps { variant?: "primary" | "secondary" | "ghost" | "danger"; size?: "md" | "sm";
icon?: string; iconAfter?: string; block?: boolean; loading?: boolean; disabled?: boolean; children?:
React.ReactNode; onClick?: (e: any) => void; type?: "button" | "submit"; }
export declare function Button(props: ButtonProps): JSX.Element;
```

## IconButton



Icon-only control with a required accessible name (also its tooltip).

```
<IconButton icon="bell" label="Notifications" />
```

40px (md) / 32px (sm). Never ship an icon-only control without `label`.

PROPS

```
import * as React from 'react';
/**
 * Icon-only control with a required accessible name (also its tooltip).
 */
export interface IconButtonProps { icon: string; label: string; size?: "md" | "sm"; pressed?: boolean;
onClick?: (e: any) => void; }
export declare function IconButton(props: IconButtonProps): JSX.Element;
```

## QuickActions




Row of 2–5 labelled starting actions for empty and onboarding states.


```
<QuickActions actions={[{label:"Add a syllabus",icon:"import"}]} />
```

PROPS

```
import * as React from 'react';
/** Row of 2–5 labelled starting actions for empty and onboarding states. */
export interface QuickActionsProps { actions: { label: string; icon?: string; onClick?: () => void }[]; }
export declare function QuickActions(props: QuickActionsProps): JSX.Element;
```

# AI

## AIResponse

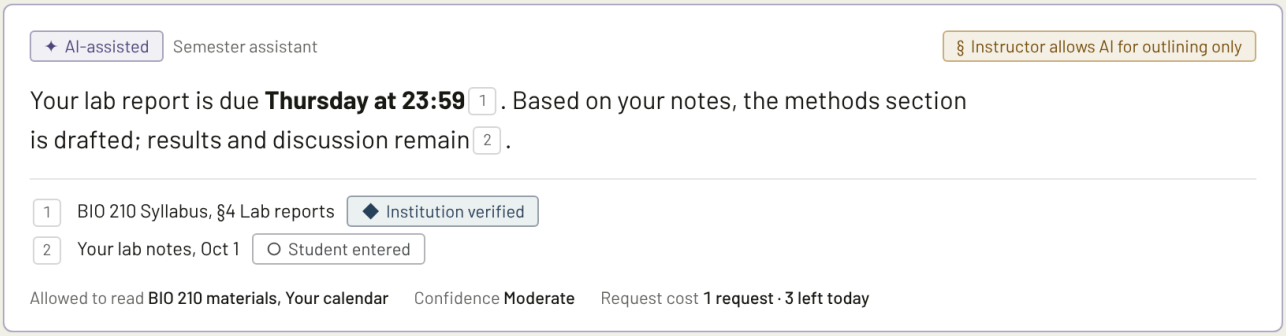


A governed assistant answer — labelled AI-assisted with data scope, numbered sources, confidence, request cost and policy.

```
<AIResponse scope={["BIO 210 materials"]} sources={[{title:"Syllabus",kind:"official"}]}
confidence="Moderate">…</AIResponse>
```

Use `.ai-cite` spans for inline [n] citations. Consequential actions go in `actions` and must open a Dialog/ActionPreview before running.

PROPS

```
import * as React from 'react';
/**
 * A governed assistant answer — labelled AI-assisted with data scope, numbered sources, confidence, request
cost and policy.
 * @startingPoint section="AI" subtitle="A governed assistant answer — labelled AI-assisted with data scope,
numbered sou" viewport="700x400"
 */
export interface AIResponseProps { children: React.ReactNode; scope?: string[]; sources?: { title: string;
kind?: string }[]; confidence?: string; cost?: string; policy?: string; actions?: React.ReactNode; model?:
string; }
export declare function AIResponse(props: AIResponseProps): JSX.Element;
```

## ProvenanceChips




A fact's origin chip plus at most two cues and its age, spoken as one sentence.

```
<ProvenanceChips origin="official" by="Registrar" cues={["action-required"]} age="Updated today"
/>
```


Origin always shows; only two cues render — the rest belong in Source & details.

PROPS

```
import * as React from 'react';
/**
 * A fact's origin chip plus at most two cues and its age, spoken as one sentence.
 */
export interface ProvenanceChipsProps { origin: string; by?: string; cues?: string[]; age?: string; }
export declare function ProvenanceChips(props: ProvenanceChipsProps): JSX.Element;
```

# Data

## DataTable

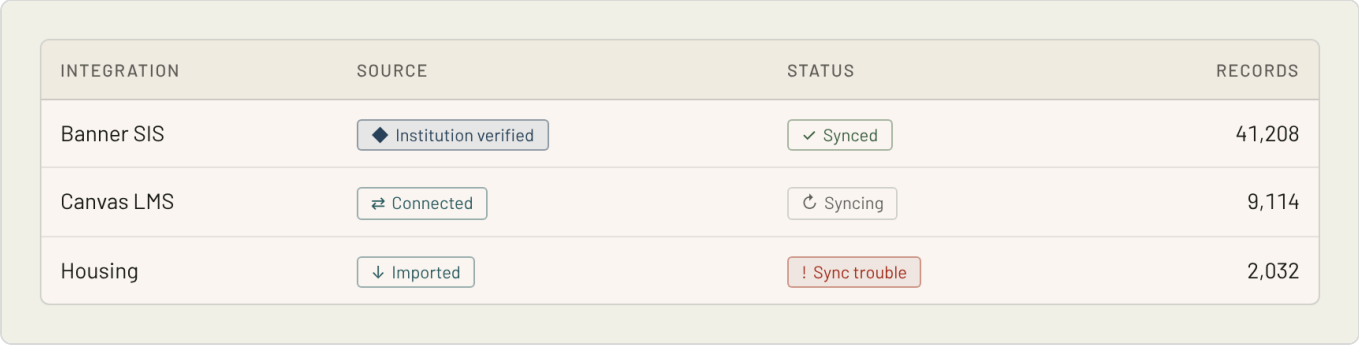


Crisp comparison table with caps headers, hairline rows, tabular numerals.


```
<DataTable caption="Holds" columns={[{key:"name",label:"Hold"}]} rows={[{name:"Immunization"}]}
/>
```

Use a list when scanning/acting on rows; a table only to compare columns.

PROPS

```
import * as React from 'react';
/**
 * Crisp comparison table with caps headers, hairline rows, tabular numerals.
 * @startingPoint section="Data" subtitle="Crisp comparison table with caps headers, hairline rows, tabular
numerals." viewport="700x400"
 */
export interface DataTableProps { columns: { key: string; label: string; numeric?: boolean; render?: (row: any)
=> React.ReactNode }[]; rows: any[]; caption?: string; }
export declare function DataTable(props: DataTableProps): JSX.Element;
```

## DecisionTrail





Auditable timeline of who did what, when, and under which authority.

```
<DecisionTrail items={[{title:"Request recorded",who:"M. Chen",when:"Oct 3 · 14:02"}]} />
```

PROPS

```
import * as React from 'react';
/**
 * Auditable timeline of who did what, when, and under which authority.
 */
export interface DecisionTrailProps { items: { title: string; who?: string; when?: string; detail?: string;
state?: "done" | "current" | "waiting" | "blocked" }[]; label?: string; }
export declare function DecisionTrail(props: DecisionTrailProps): JSX.Element;
```

## Fields





Label/value definition list for records and context.

```
<Fields items={[{field:"Environment",value:"Production"}]} />
```

PROPS

```
import * as React from 'react';
/**
 * Label/value definition list for records and context.
 */
export interface FieldsProps { items: { field: string; value: React.ReactNode; mono?: boolean }[]; label?:
string; }
export declare function Fields(props: FieldsProps): JSX.Element;
```

## MetricTile

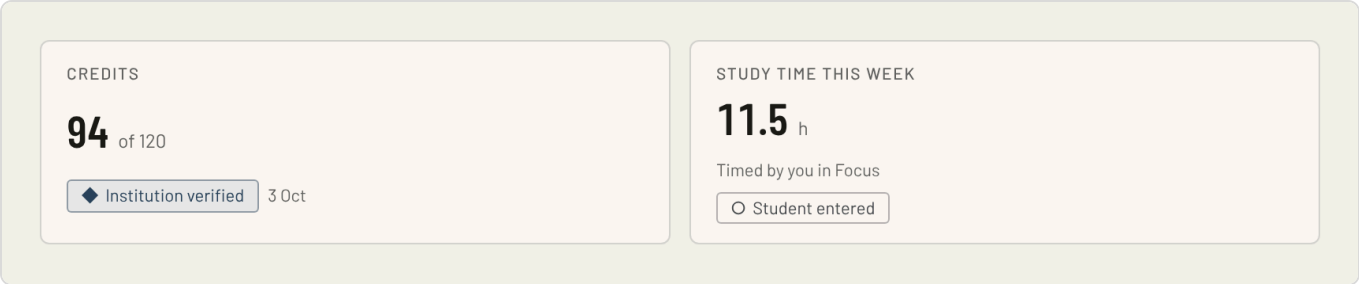


One figure worth reading first, with unit, source and age.


```
<MetricTile label="Credits" value="94" unit="of 120" source="official" updated="3 Oct" />
```

Never an outcome claim (GPA lift, time saved).

PROPS

```
import * as React from 'react';
/** One figure worth reading first, with unit, source and age. */
export interface MetricTileProps { label: string; value: string; unit?: string; source?: string; updated?:
string; delta?: string; }
export declare function MetricTile(props: MetricTileProps): JSX.Element;
```

## ProvenanceChart

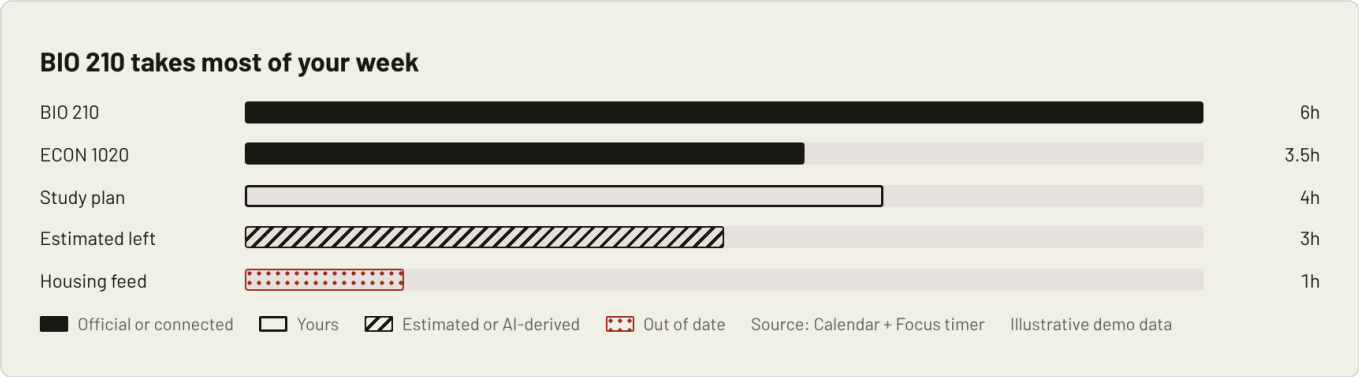


Bar chart that encodes provenance: solid official/connected, outline yours, hatched estimated/AI, dotted stale.

```
<ProvenanceChart title="Hours this week, by course" rows={[{label:"BIO
210",value:6,source:"personal"}]} unit="h" />
```

Title states the finding; every bar labelled directly; "Illustrative demo data" when `demo`.

PROPS

```
import * as React from 'react';
/** Bar chart that encodes provenance: solid official/connected, outline yours, hatched estimated/AI, dotted
stale. */
export interface ProvenanceChartProps { title: string; rows: { label: string; value: number; source?: string }
[]; unit?: string; max?: number; source?: string; demo?: boolean; }
export declare function ProvenanceChart(props: ProvenanceChartProps): JSX.Element;
```

# Forms

## Choice




Radio/checkbox row with a sentence explaining the consequence — used for visibility and sharing choices.


```
<Choice name="vis" label="Only me" about="Nobody else can see this." checked />
```

24px+ target, 44px row. Use for consent/sharing where the consequence must be read.

PROPS

```
import * as React from 'react';
/**
 * Radio/checkbox row with a sentence explaining the consequence — used for visibility and sharing choices.
 */
export interface ChoiceProps { type?: "radio" | "checkbox"; label: string; about?: string; checked?: boolean;
onChange?: (e: any) => void; name?: string; value?: string; disabled?: boolean; }
export declare function Choice(props: ChoiceProps): JSX.Element;
```

## Combobox

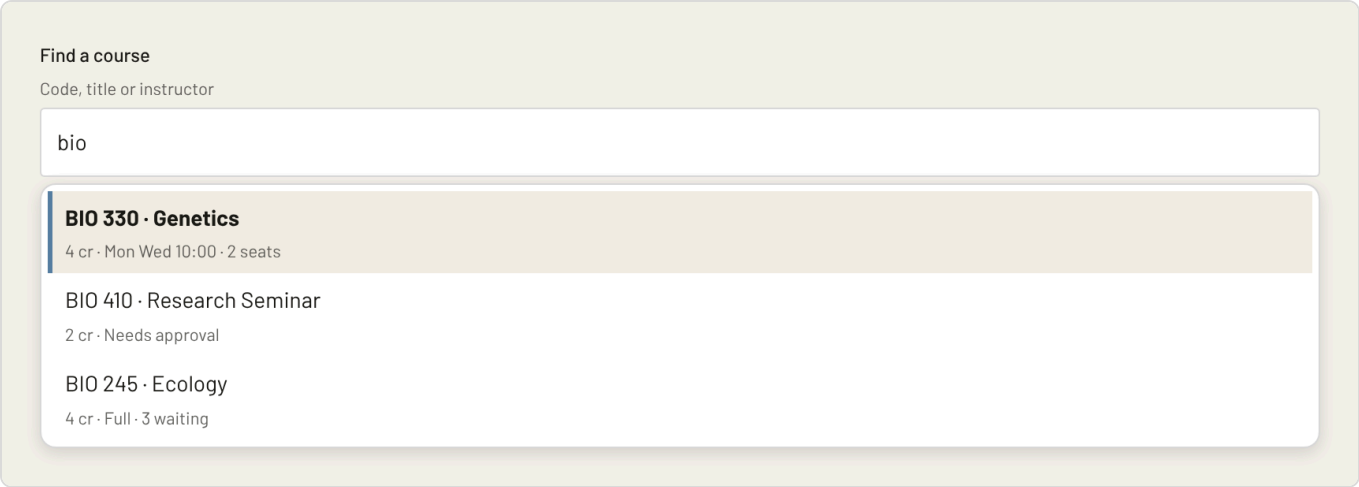


Text box with a filtered listbox beneath — course search, people, rooms.

```
<Combobox label="Find a course" options={[{label:"BIO 330 · Genetics",detail:"4 cr · MW 10:00"}]}
/>
```

Selected row = 3px leading edge + weight. Escape closes; Enter picks.

PROPS

```
import * as React from 'react';
/** Text box with a filtered listbox beneath — course search, people, rooms. */
export interface ComboboxProps { label: string; hint?: string; options: { label: string; detail?: string }[];
value?: string; onChange?: (q: string) => void; onSelect?: (o: any) => void; placeholder?: string;
defaultOpen?: boolean; }
export declare function Combobox(props: ComboboxProps): JSX.Element;
```

## DateField




Native date/time input with the chosen date spoken back unambiguously.

```
<DateField label="Due" value="2026-10-09" said="Thu 9 Oct 2026" />
```

Always show `said` in "Thu 9 Oct 2026" form so locale order can't mislead.

PROPS

```
import * as React from 'react';
/** Native date/time input with the chosen date spoken back unambiguously. */
export interface DateFieldProps { label: string; hint?: string; value?: string; onChange?: (e: any) => void;
withTime?: boolean; said?: string; }
export declare function DateField(props: DateFieldProps): JSX.Element;
```

## Segmented




2–4 mutually exclusive view choices (e.g. Cards / Rows / Timeline).

```
<Segmented label="Feed" options={["Cards","Rows","Timeline"]} value="Cards" />
```

Selected = inverted ink. 32px tall; reserved for presentation choices, not navigation.

PROPS

```
import * as React from 'react';
/**
 * 2–4 mutually exclusive view choices (e.g. Cards / Rows / Timeline).
 */
export interface SegmentedProps { options: (string | { value: string; label: string })[]; value: string;
onChange?: (v: string) => void; label: string; }
export declare function Segmented(props: SegmentedProps): JSX.Element;
```

## Select




Native select drawn in Semester's palette.


```
<Select label="Term" options={["Fall 2026","Spring 2027"]} />
```

Use native semantics; don't imitate a select with a menu.

PROPS

```
import * as React from 'react';
/**
 * Native select drawn in Semester's palette.
 */
export interface SelectProps { label: string; hint?: string; options: (string | { value: string; label: string
})[]; value?: string; onChange?: (e: any) => void; id?: string; }
export declare function Select(props: SelectProps): JSX.Element;
```

## Switch




On/off setting that speaks its state as a word beside the track.

```
<Switch label="Share grades with Alex" checked />
```

role="switch"; On/Off text is always visible.

PROPS

```
import * as React from 'react';
/**
 * On/off setting that speaks its state as a word beside the track.
 */
export interface SwitchProps { checked?: boolean; onChange?: (v: boolean) => void; label: string; disabled?:
boolean; }
export declare function Switch(props: SwitchProps): JSX.Element;
```

## TextField




Labelled input/textarea with associated hint and error — the label is always visible.


```
<TextField label="Preferred name" hint="Shown to classmates and instructors." />
```

`error` sets aria-invalid and a "!"-prefixed message. Placeholder is an example, never the label.

PROPS

```
import * as React from 'react';
/**
 * Labelled input/textarea with associated hint and error — the label is always visible.
 * @startingPoint section="Forms" subtitle="Labelled input/textarea with associated hint and error — the label
is always vis" viewport="700x400"
 */
export interface TextFieldProps { label: string; hint?: string; error?: string; multiline?: boolean; id?:
string; value?: string; placeholder?: string; onChange?: (e: any) => void; disabled?: boolean; }
export declare function TextField(props: TextFieldProps): JSX.Element;
```

## VisibilityPicker

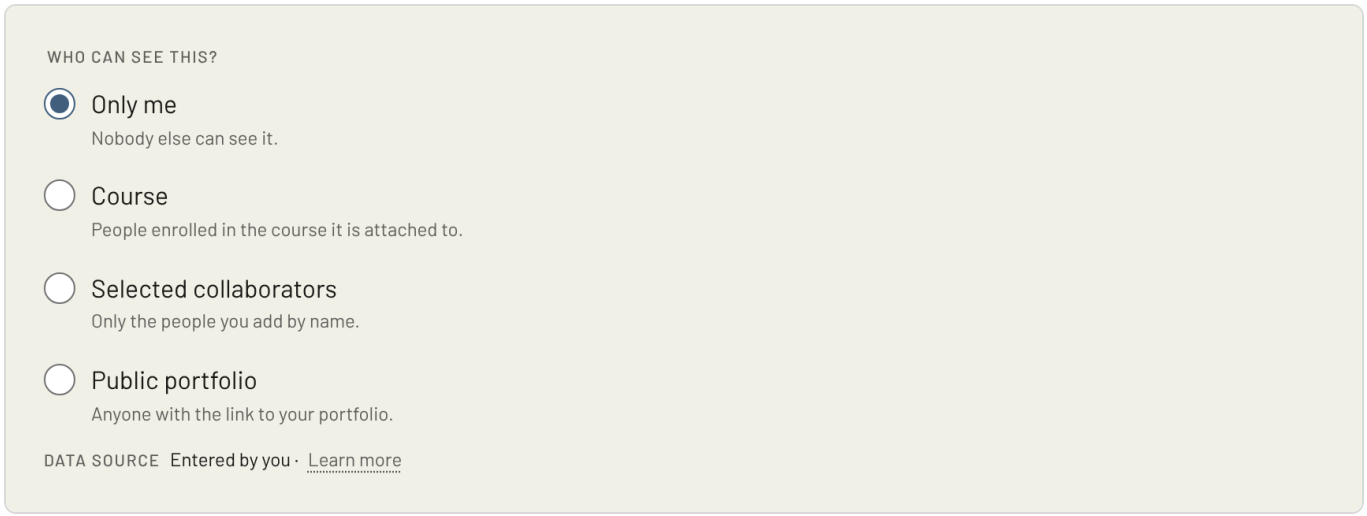


"Who can see this?" — the one privacy pattern, with the same four answers in every module.

```
<VisibilityPicker value="only-me" allowed={["only-me","course"]} />
```


Only offer audiences the module can actually honour. `locked` draws the statement alone. Presentation only — never grants access itself.

PROPS

```
import * as React from 'react';
/** "Who can see this?" — the one privacy pattern, with the same four answers in every module. */
export interface VisibilityPickerProps { value?: "only-me" | "course" | "collaborators" | "portfolio";
onChange?: (v: string) => void; allowed?: string[]; locked?: boolean; origin?: "student-entered" |
"institution-provided" | "connected-system"; onLearnMore?: () => void; }
export declare function VisibilityPicker(props: VisibilityPickerProps): JSX.Element;
```

# Glyph

## Avatar




Initials in a tinted square that follows the corner setting; profile glyph when no name.

```
<Avatar name="Maya Lindqvist" size={40} />
```

No photos, never derived from an email address.

PROPS

```
import * as React from 'react';
/** Initials in a tinted square that follows the corner setting; profile glyph when no name. */
export interface AvatarProps { name?: string; size?: number; }
export declare function Avatar(props: AvatarProps): JSX.Element;
```

## Icon



Semester line glyph (Lucide-like, 24 grid, 1.5 stroke) from the app's own icon set — 108 names, see assets/icons/.


```
<Icon name="calendar" size={19} />
```

`label` makes it a named image; otherwise decorative. Names: today, courses, calendar, study, degree, registrar, costs, family, career, campus, meals, housing, ask, sources, privacy, settings, search, bell…

PROPS

```
import * as React from 'react';
/**
 * Semester line glyph (Lucide-like, 24 grid, 1.5 stroke) from the app's own icon set — 108 names, see
assets/icons/.
 * @startingPoint section="Glyph" subtitle="Semester line glyph (Lucide-like, 24 grid, 1.5 stroke) from the
app's own icon s" viewport="700x400"
 */
export interface IconProps { name: string; size?: number; label?: string; strokeWidth?: number; style?:
React.CSSProperties; className?: string; }
export declare function Icon(props: IconProps): JSX.Element;
export declare const ICON_NAMES: string[];
```

## Wordmark




The Semester lockup — three-slab mark + SEMESTER in Barlow Condensed caps; also exports `Mark`.

```
<Wordmark size={20} metal />
```


`metal` paints brushed sterling for dark chrome. `<Mark size={24}/>` alone for tiles/favicons.

PROPS

```
import * as React from 'react';
/**
 * The Semester lockup — three-slab mark + SEMESTER in Barlow Condensed caps; also exports `Mark`.
 */
export interface WordmarkProps { size?: number; metal?: boolean; showWord?: boolean; style?:
React.CSSProperties; }
export declare function Wordmark(props: WordmarkProps): JSX.Element;
export declare function Mark(props: { size?: number; style?: React.CSSProperties; className?: string }):
JSX.Element;
```

# Navigation

## CommandPalette

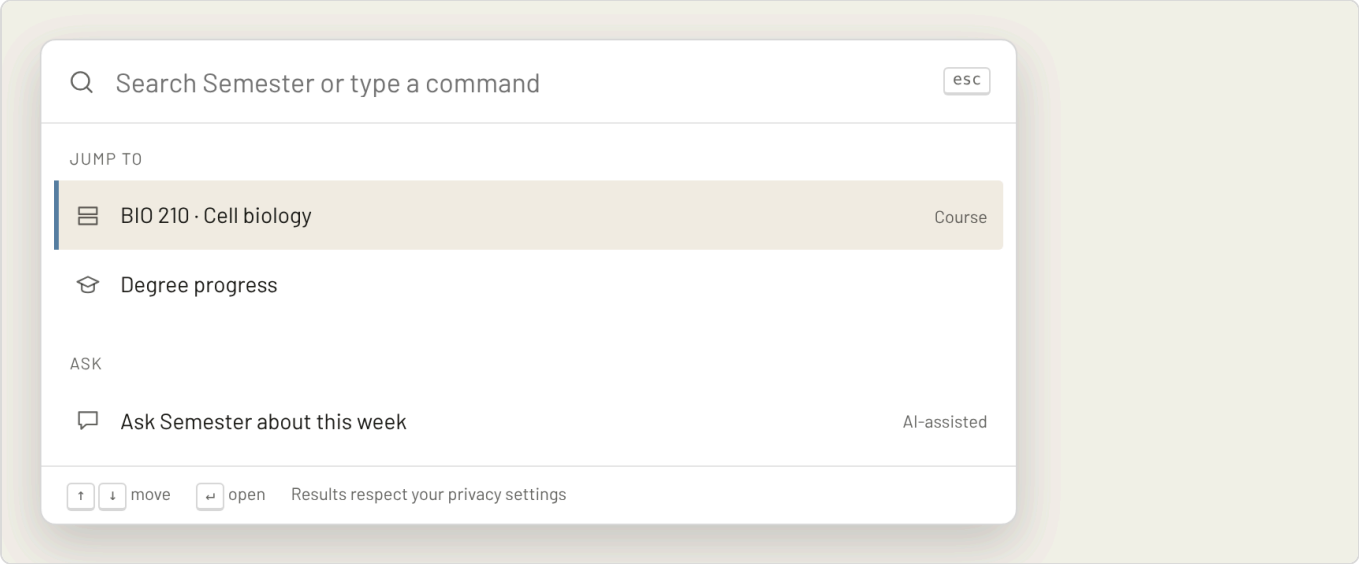



Global search and command palette (⌘K) with keyboard selection.

```
<CommandPalette groups={[{label:"Jump to",items:[{label:"BIO 210",icon:"courses"}]}]} />
```

PROPS

```
import * as React from 'react';
/**
 * Global search and command palette (⌘K) with keyboard selection.
 */
export interface CommandPaletteProps { groups: { label: string; items: { label: string; icon?: string; detail?:
string }[] }[]; placeholder?: string; onSelect?: (item: any) => void; }
export declare function CommandPalette(props: CommandPaletteProps): JSX.Element;
```

## SideRail

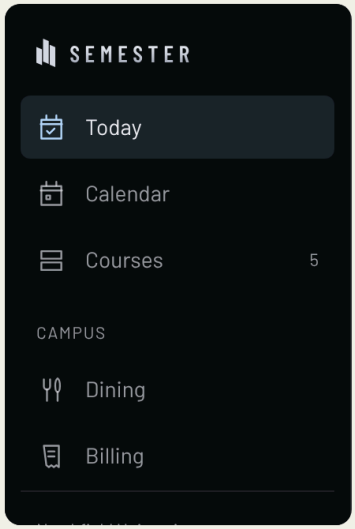


Desktop side rail on dark Ink chrome — persistent, quiet, labelled.


```
<SideRail current="today" groups={[{items:[{id:"today",label:"Today",icon:"today"}]}]} />
```

248px wide. Current row = blue-tinted wash + blue glyph.

PROPS

```
import * as React from 'react';
/**
 * Desktop side rail on dark Ink chrome — persistent, quiet, labelled.
 * @startingPoint section="Navigation" subtitle="Desktop side rail on dark Ink chrome — persistent, quiet,
labelled." viewport="700x400"
 */
export interface SideRailProps { groups: { label?: string; items: { id: string; label: string; icon: string;
count?: number }[] }[]; current?: string; onNavigate?: (id: string) => void; foot?: React.ReactNode; brand?:
boolean; }
export declare function SideRail(props: SideRailProps): JSX.Element;
```

## SystemContextBar

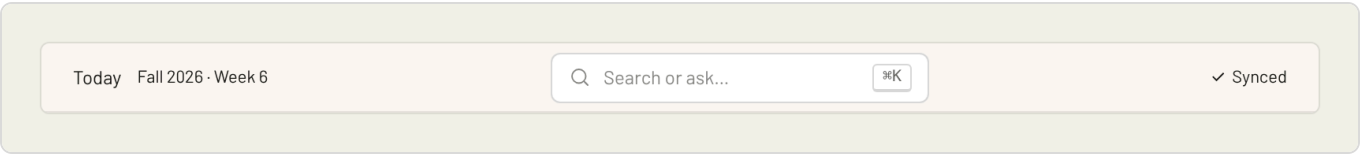



Persistent top bar: location, term, ⌘K search, sync state, quiet tools.

```
<SystemContextBar location="Today" term="Fall 2026 · Week 6" sync="synced" />
```

PROPS

```
import * as React from 'react';
/**
 * Persistent top bar: location, term, ⌘K search, sync state, quiet tools.
 */
export interface SystemContextBarProps { location?: string; term?: string; sync?: string; onSearch?: () =>
void; actions?: React.ReactNode; }
export declare function SystemContextBar(props: SystemContextBarProps): JSX.Element;
```

## TabBar




Mobile bottom navigation for the five canonical destinations, always labelled.

```
<TabBar current="today" items={[{id:"today",label:"Today",icon:"today"}]} />
```


Frosted Ink only where blur is supported; opaque otherwise.

PROPS

```
import * as React from 'react';
/**
 * Mobile bottom navigation for the five canonical destinations, always labelled.
 */
export interface TabBarProps { items: { id: string; label: string; icon: string }[]; current?: string;
onNavigate?: (id: string) => void; }
export declare function TabBar(props: TabBarProps): JSX.Element;
```

# States

## EmptyState

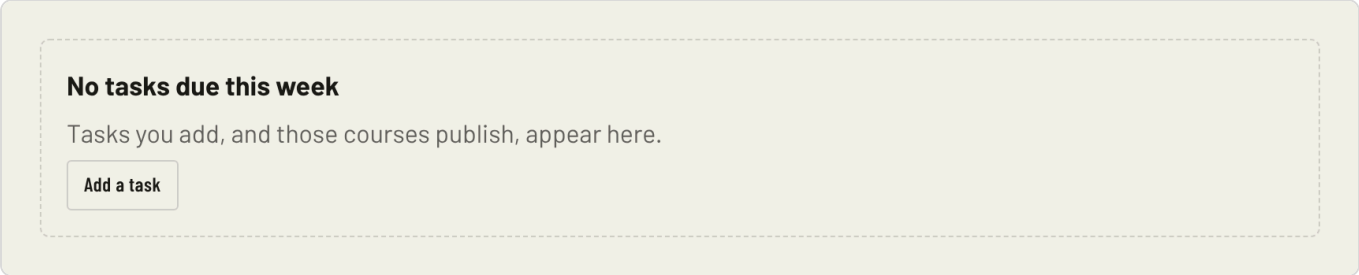


Explains why a list is empty and offers one relevant next action.


```
<EmptyState title="No tasks due this week" body="Tasks you add or that courses publish appear here." action={<Button>Add a task</Button>} />
```

Dashed hairline frame; never decorative illustration.

PROPS

```
import * as React from 'react';
/**
 * Explains why a list is empty and offers one relevant next action.
 * @startingPoint section="States" subtitle="Explains why a list is empty and offers one relevant next action."
viewport="700x400"
 */
export interface EmptyStateProps { title: string; body?: string; action?: React.ReactNode; }
export declare function EmptyState(props: EmptyStateProps): JSX.Element;
```

## ErrorState

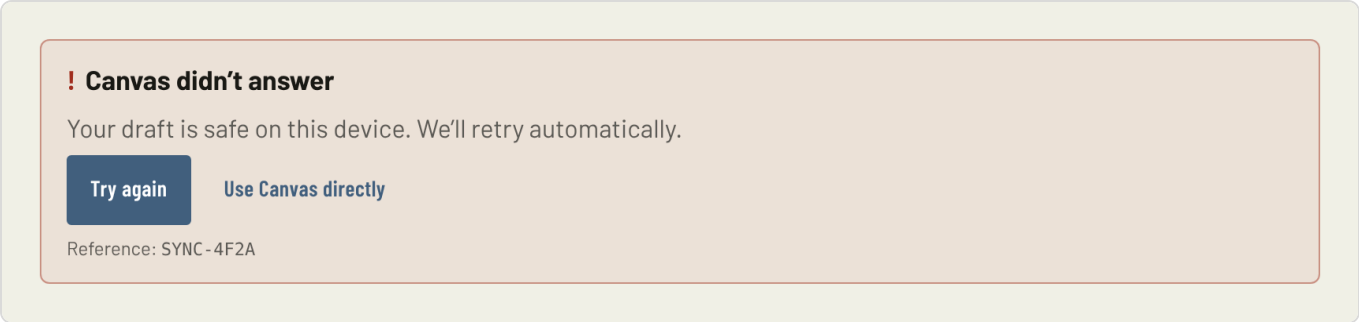


Plain-language failure with a required recovery action and an optional support reference.

```
<ErrorState title="Canvas didn’t answer" body="Your draft is safe on this device."
reference="SYNC-4F2A" />
```

role="alert"; preserve the user's input, separate retryable failure from permission.

PROPS

```
import * as React from 'react';
/**
 * Plain-language failure with a required recovery action and an optional support reference.
 */
export interface ErrorStateProps { title: string; body: string; recoverLabel?: string; onRecover?: () => void;
secondaryLabel?: string; onSecondary?: () => void; reference?: string; }
export declare function ErrorState(props: ErrorStateProps): JSX.Element;
```

## LoadingState



Still structural placeholders plus a spoken "Loading …" — no spinner or shimmer.

```
<LoadingState what="your courses" />
```

Only when the final shape is known; otherwise say what is happening in words.

PROPS

```
import * as React from 'react';
/**
 * Still structural placeholders plus a spoken "Loading …" — no spinner or shimmer.
 */
export interface LoadingStateProps { what?: string; bars?: number[]; }
export declare function LoadingState(props: LoadingStateProps): JSX.Element;
```

## Notice





One-line service or context notice (role=status).

```
<Notice head="Calendar">Sync is slow right now; times may be up to 10 minutes old.</Notice>
```

PROPS

```
import * as React from 'react';
/**
 * One-line service or context notice (role=status).
 */
export interface NoticeProps { head?: string; children: React.ReactNode; }
export declare function Notice(props: NoticeProps): JSX.Element;
```

## OfflineStrip

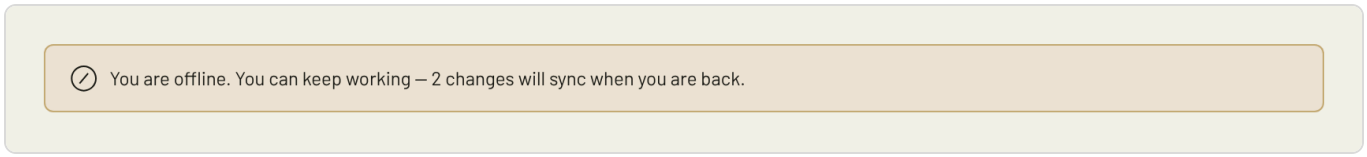



Offline strip that says what still works and that changes are queued.

```
<OfflineStrip queued={2} />
```

PROPS

```
import * as React from 'react';
/**
 * Offline strip that says what still works and that changes are queued.
 */
export interface OfflineStripProps { queued?: number; syncs?: boolean; }
export declare function OfflineStrip(props: OfflineStripProps): JSX.Element;
```

## PermissionNotice

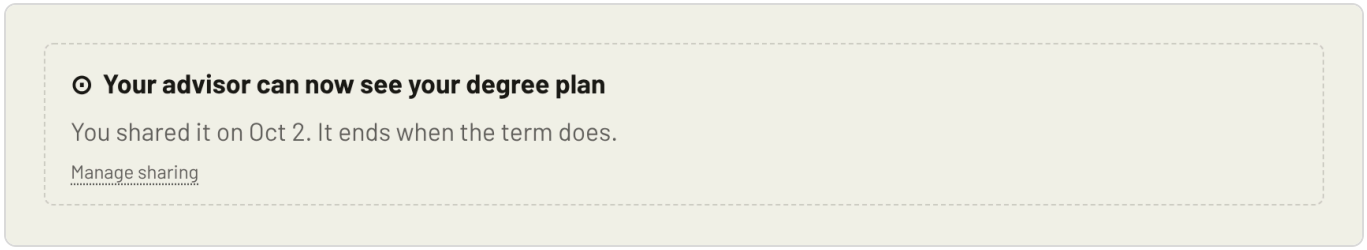



States what changed about access, why, and where it is controlled.

```
<PermissionNotice changed="Your advisor can now see your degree plan" why="You shared it on Oct
2." controlLabel="Manage sharing" />
```

PROPS

```
import * as React from 'react';
/**
 * States what changed about access, why, and where it is controlled.
 */
export interface PermissionNoticeProps { changed: string; why: string; controlLabel?: string; onControl?: () =>
void; }
export declare function PermissionNotice(props: PermissionNoticeProps): JSX.Element;
```

## ProgressState

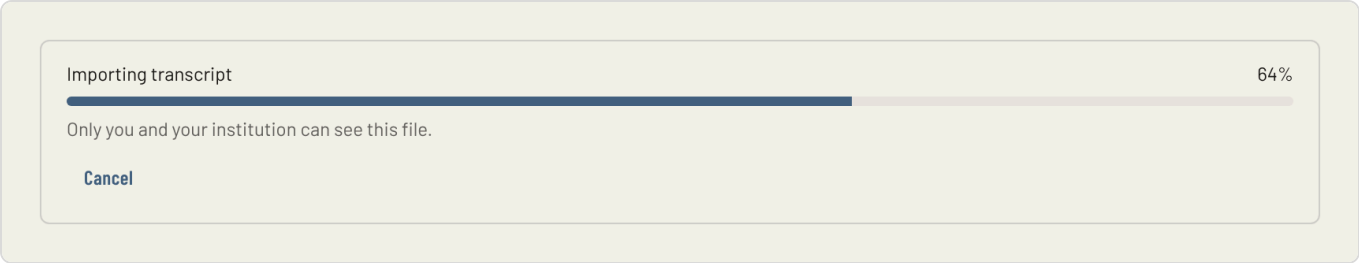


A determinate wait (upload, import) with real


```
<ProgressState label="Importing transcript" done={64} total={100} note="Only your institution and you can see this file." />
```

`failed` swaps the bar for the reason + Retry.

PROPS

```
import * as React from 'react';
/**
 * A determinate wait (upload, import) with real <progress>, percentage in words, Cancel/Retry.
 */
export interface ProgressStateProps { label: string; done?: number; total?: number; note?: string; failed?: string; onCancel?: () => void; onRetry?: () => void; }
export declare function ProgressState(props: ProgressStateProps): JSX.Element;
```

## SaveState




The quiet "Saving… → Saved" line near the work, in a polite live region.


```
<SaveState status="saved" />
```

offline/conflict/sync-error announce assertively.

PROPS

```
import * as React from 'react';
/**
 * The quiet "Saving… → Saved" line near the work, in a polite live region.
 */
export interface SaveStateProps { status?: string; }
export declare function SaveState(props: SaveStateProps): JSX.Element;
```

## StepStatus

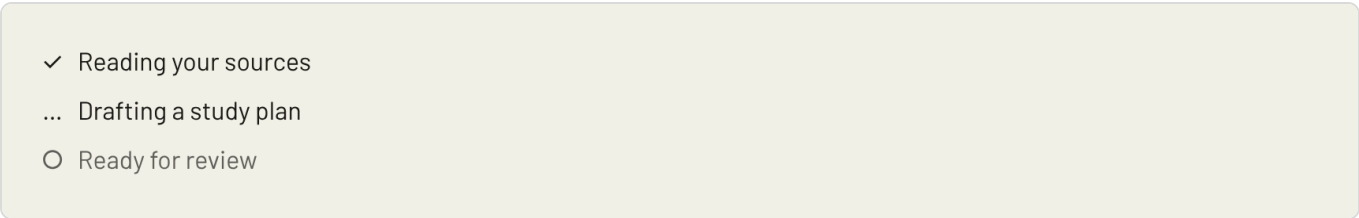



A process in named steps — shows the AI or system working instead of faking certainty.

```
<StepStatus steps={[{label:"Reading sources",state:"done"},{label:"Drafting",state:"working"}]}
/>
```

PROPS

```
import * as React from 'react';
/**
 * A process in named steps — shows the AI or system working instead of faking certainty.
 */
export interface StepStatusProps { steps: { label: string; state: "waiting" | "working" | "done" | "failed" }
[]; label?: string; }
export declare function StepStatus(props: StepStatusProps): JSX.Element;
```

## SuccessState

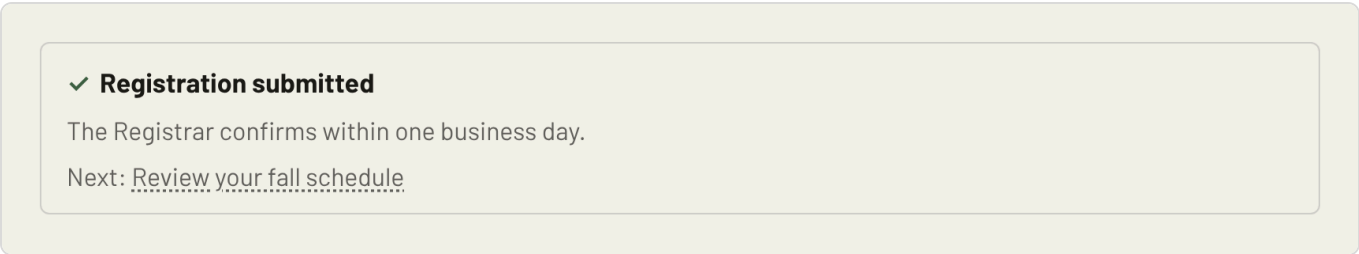



Respectful acknowledgement that points at what is next — no confetti, streaks or ranks.

```
<SuccessState title="Registration submitted" nextLabel="Review your fall schedule" />
```

PROPS

```
import * as React from 'react';
/**
 * Respectful acknowledgement that points at what is next — no confetti, streaks or ranks.
 */
export interface SuccessStateProps { title: string; body?: string; nextLabel?: string; onNext?: () => void; }
export declare function SuccessState(props: SuccessStateProps): JSX.Element;
```

## UndoToast

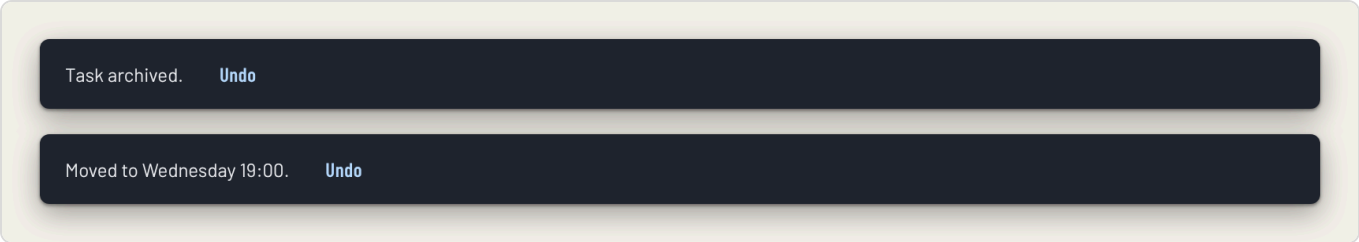


One-sentence confirmation with Undo for reversible work — instead of an "are you sure?" dialog.

```
<UndoToast message="Task archived." onUndo={() => {}} />
```

Ink surface on every ground. Never for consequential or financial actions — those use Dialog + ActionPreview.

PROPS

```
import * as React from 'react';
/** One-sentence confirmation with Undo for reversible work — instead of an "are you sure?" dialog. */
export interface UndoToastProps { message: string; onUndo?: () => void; undoLabel?: string; }
export declare function UndoToast(props: UndoToastProps): JSX.Element;
```

# Surfaces

## ContextBar




The object a screen is about, with its states and actions.


```
<ContextBar kicker="BIO 210 · Assignment" title="Lab report 3" states={<StatusChip
status="draft"/>} />
```

Inside an existing panel it drops its own frame.

PROPS

```
import * as React from 'react';
/**
 * The object a screen is about, with its states and actions.
 */
export interface ContextBarProps { kicker?: string; title: string; states?: React.ReactNode; actions?:
React.ReactNode; }
export declare function ContextBar(props: ContextBarProps): JSX.Element;
```

## Dialog

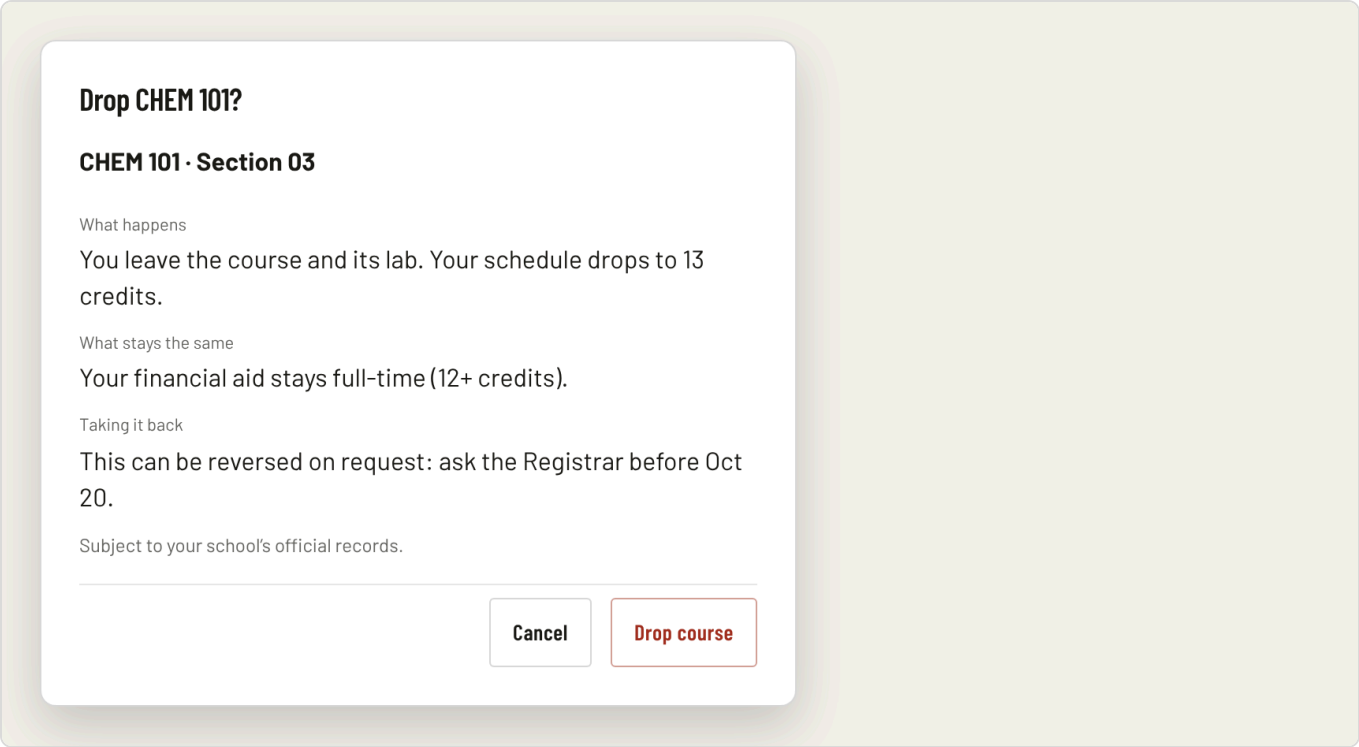


Modal confirmation — focus lands on Cancel, Escape closes, names object + consequence + recovery.


```
<Dialog title="Submit registration?" confirmLabel="Submit"><ActionPreview … /></Dialog>
```

`destructive` uses red-ink button. `inline` renders without scrim (for docs).

PROPS

```
import * as React from 'react';
/**
 * Modal confirmation — focus lands on Cancel, Escape closes, names object + consequence + recovery.
 */
export interface DialogProps { open?: boolean; title: string; children?: React.ReactNode; confirmLabel?:
string; cancelLabel?: string; onConfirm?: () => void; onCancel?: () => void; destructive?: boolean; inline?:
boolean; }
export declare function Dialog(props: DialogProps): JSX.Element;
```

## FocusBar




Floating pill during a focus session: time left, task, Pause, End.


```
<FocusBar task="Lab report 3 · results" remaining="24:10" />
```

The only frosted overlay besides the tab bar; opaque under reduced transparency.

PROPS

```
import * as React from 'react';
/** Floating pill during a focus session: time left, task, Pause, End. */
export interface FocusBarProps { task: string; remaining?: string; onPause?: () => void; onEnd?: () => void;
breakDue?: string; }
export declare function FocusBar(props: FocusBarProps): JSX.Element;
```

## NextSteps

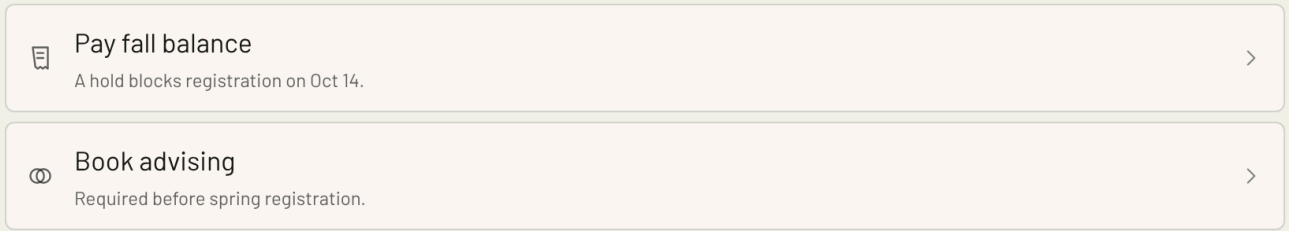



Ordered list of next safe actions, each with one line of why.

```
<NextSteps steps={[{label:"Pay fall balance",why:"A hold blocks registration on Oct
14.",icon:"costs"}]} />
```

PROPS

```
import * as React from 'react';
/**
 * Ordered list of next safe actions, each with one line of why.
 */
export interface NextStepsProps { steps: { label: string; why?: string; icon?: string; aside?: React.ReactNode;
onClick?: () => void }[]; }
export declare function NextSteps(props: NextStepsProps): JSX.Element;
```

## ObjectCard

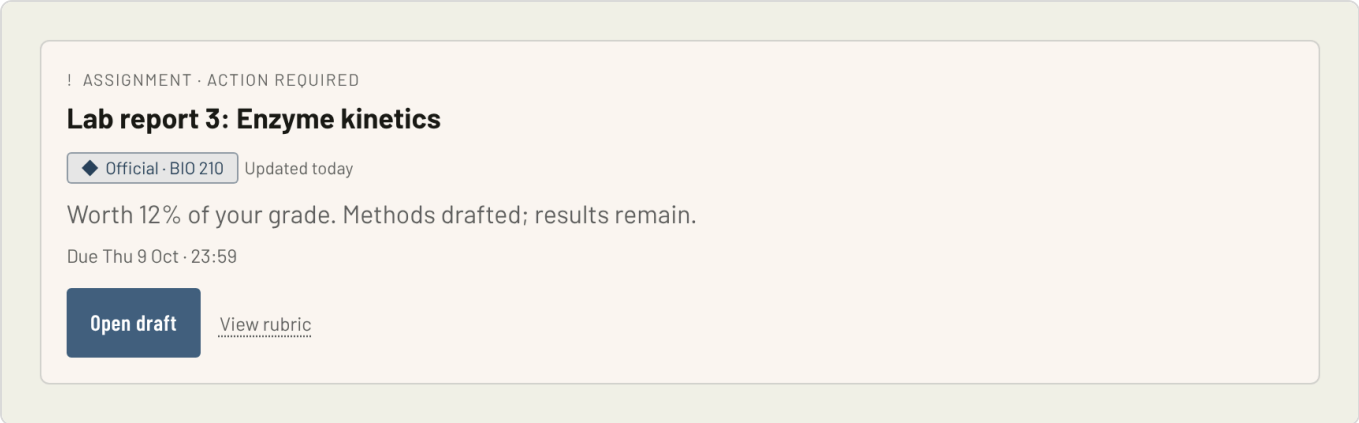


The universal decision card: eyebrow → title → provenance → why → metadata → one primary + one quiet secondary.

```
<ObjectCard kind="Assignment" title="Lab report 3" provenance={{origin:"official",by:"BIO 210"}}
explanation="Worth 12% of your grade." metadata="Due Thu 9 Oct · 23:59" primary={{label:"Open
draft"}} secondary={{label:"View rubric"}} />
```

A card groups a decision, not every paragraph. Never nest cards.

PROPS

```
import * as React from 'react';
/**
 * The universal decision card: eyebrow → title → provenance → why → metadata → one primary + one quiet
secondary.
 * @startingPoint section="Surfaces" subtitle="The universal decision card: eyebrow → title → provenance → why
→ metadata → one" viewport="700x400"
 */
export interface ObjectCardProps { kind?: string; statuses?: string[]; title: string; provenance?: { origin:
string; by?: string; cues?: string[]; age?: string }; explanation?: string; metadata?: string; primary?: {
label: string; onClick?: () => void }; secondary?: { label: string; onClick?: () => void }; tone?: "pending" |
"danger"; level?: 2 | 3 | 4; children?: React.ReactNode; }
export declare function ObjectCard(props: ObjectCardProps): JSX.Element;
```

## OpenIn




"Open in" row — the way from one object to every place it matters (Plan, Study, Calendar).


```
<OpenIn about="BIO 210" targets={["Plan","Study","Calendar"]} />
```

Words, never icons alone.

PROPS

```
import * as React from 'react';
/** "Open in" row — the way from one object to every place it matters (Plan, Study, Calendar). */
export interface OpenInProps { targets: string[]; about: string; onOpen?: (t: string) => void; }
export declare function OpenIn(props: OpenInProps): JSX.Element;
```

## ScreenGuide

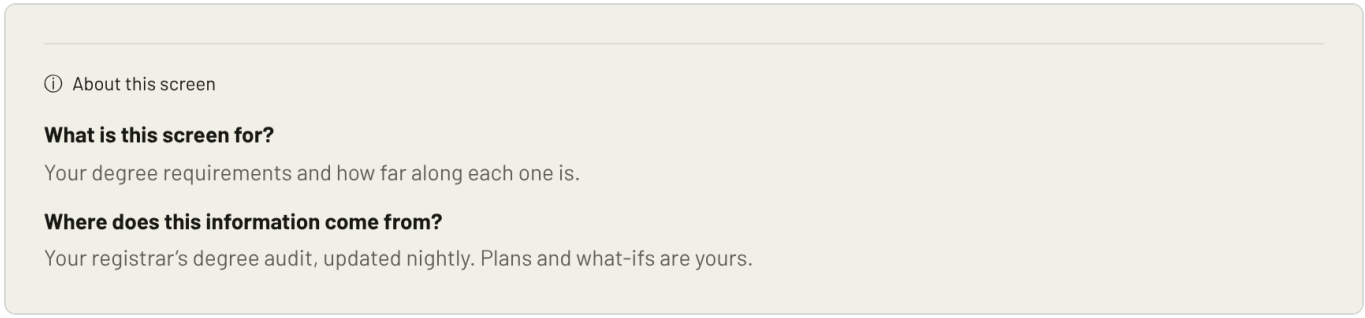


"About this screen" disclosure at the foot of every screen — what it is for, where its data comes from, who decides.

```
<ScreenGuide items={[{q:"Where does this information come from?",a:"Your registrar’s degree
audit, updated nightly."}]} />
```

PROPS

```
import * as React from 'react';
/** "About this screen" disclosure at the foot of every screen — what it is for, where its data comes from, who
decides. */
export interface ScreenGuideProps { items: { q: string; a: string }[]; open?: boolean; }
export declare function ScreenGuide(props: ScreenGuideProps): JSX.Element;
```

## SectionLabel




The small uppercase kicker that heads a section, with an optional right-aligned count.


```
<SectionLabel aside="3">Begin today</SectionLabel>
```

Tracked 0.08em caps at 10.5px, secondary ink.

PROPS

```
import * as React from 'react';
/**
 * The small uppercase kicker that heads a section, with an optional right-aligned count.
 */
export interface SectionLabelProps { children: React.ReactNode; aside?: React.ReactNode; as?: "h2" | "h3" |
"h4"; style?: React.CSSProperties; }
export declare function SectionLabel(props: SectionLabelProps): JSX.Element;
```

## Sheet

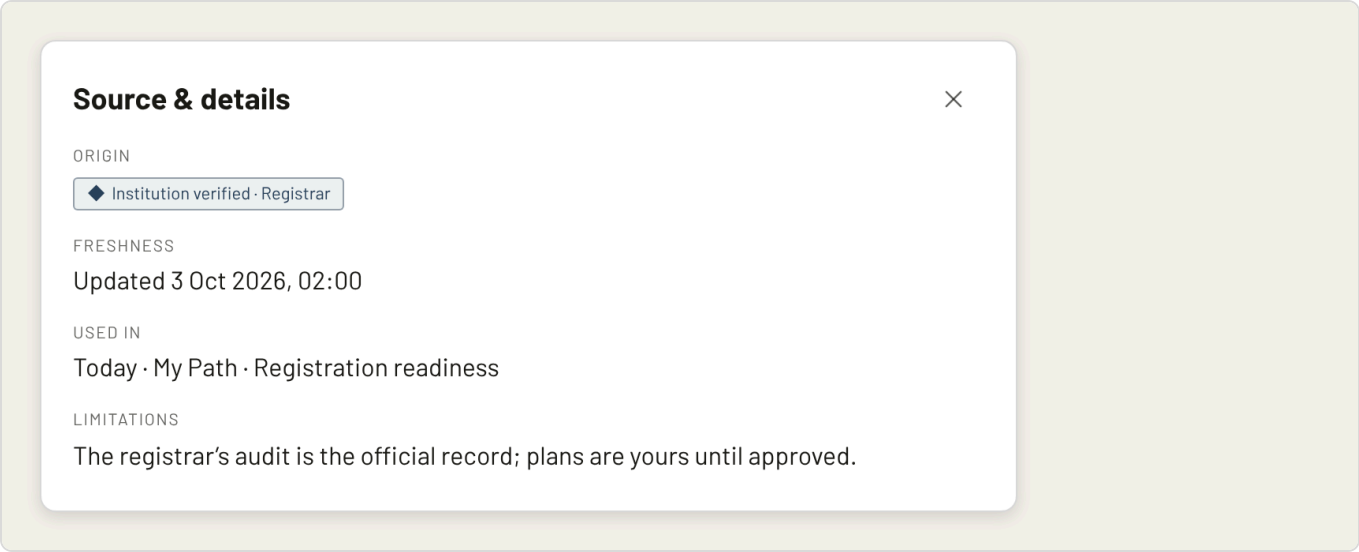


Bottom sheet on mobile, window on desktop; the home of "Source & details". Also exports `SourceDetails`.

```
<Sheet title="Source & details"><SourceDetails items={[{label:"Origin",value:"Official · Registrar"}]} /></Sheet>
```


Rows: Origin, Freshness, Used in, Who can see this, Limitations, Report.

PROPS

```
import * as React from 'react';
/** Bottom sheet on mobile, window on desktop; the home of "Source & details". Also exports `SourceDetails`. */
export interface SheetProps { title: string; children?: React.ReactNode; onClose?: () => void; inline?: boolean; actions?: React.ReactNode; }
export declare function Sheet(props: SheetProps): JSX.Element;
export declare function SourceDetails(props: { items: { label: string; value: React.ReactNode }[] }): JSX.Element;
```

# Trust & provenance

## SourceBadge




Where a fact came from, beside the fact — controlled vocabulary (glyph + word + tone).


```
<SourceBadge source="official" by="Registrar" updated="Updated 2h ago" />
```

official navy (solid), connected teal, personal graphite, ai violet (always labelled), estimated/review amber, stale red, sample dashed. `onReport` adds "Report incorrect information".

PROPS

```
import * as React from 'react';
/**
 * Where a fact came from, beside the fact — controlled vocabulary (glyph + word + tone).
 * @startingPoint section="Trust & provenance" subtitle="Where a fact came from, beside the fact — controlled
vocabulary (glyph + word + " viewport="700x400"
 */
export interface SourceBadgeProps { source: "official" | "connected" | "imported" | "personal" | "ai" |
"estimated" | "review" | "stale" | "external" | "sample"; updated?: string; by?: string; onReport?: () => void;
}
export declare function SourceBadge(props: SourceBadgeProps): JSX.Element;
```

## SourceLine

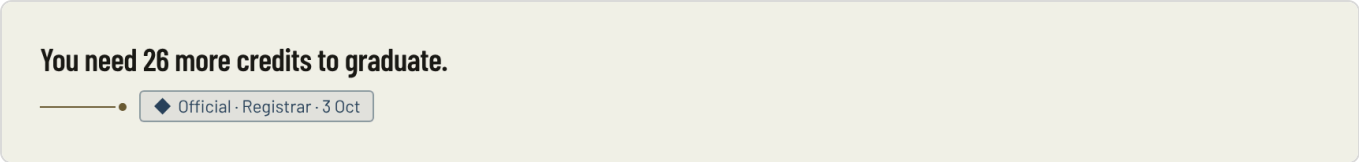


The Source Line — a thin brass/editorial rule from a statement to its source chip; Semester's signature device (docs/BRAND-PLATFORM.md §2.6).


```
<SourceLine source="official" by="Registrar" when="3 Oct"><h2>You need 26 more credits to graduate.</h2></SourceLine>
```

Never decorative: use only where a real source label exists. The chip carries the word; the line is reinforcement.

PROPS

```
import * as React from 'react';
/** The Source Line — Semester's signature device: a thin editorial rule from a statement to its source chip.
*/
export interface SourceLineProps { children: React.ReactNode; source?: string; by?: string; when?: string }
export declare function SourceLine(props: SourceLineProps): JSX.Element;
```

## StatusChip




One status chip — glyph + word + tone from the shared status table.

```
<StatusChip status="pending" />
```


Keys: saving, saved, syncing, synced, offline, queued, conflict, sync-error, needs-confirmation, action-required, pending, approved, rejected, verified, hold, faculty-approved, course-provided, updated-today, draft, live, beta.

PROPS

```
import * as React from 'react';
/**
 * One status chip — glyph + word + tone from the shared status table.
 */
export interface StatusChipProps { status: string; label?: string; }
export declare function StatusChip(props: StatusChipProps): JSX.Element;
```

# Governance

## ApprovalBanner




Approval state for a consequential action (two-person rule): required → pending → approved/rejected, with the right buttons for the viewer. Pair with ActionPreview and DecisionTrail.

```
<ApprovalBanner state="pending" what="Prerequisite override for HIST 2140" approver="Registrar Ortiz" onApprove={a} onReject={r} />
```

PROPS

```
import * as React from 'react';
export interface ApprovalBannerProps { state?: "required" | "pending" | "approved" | "rejected"; what: string; approver?: string; requestedBy?: string; onRequest?: () => void; onApprove?: () => void; onReject?: () => void; }
export declare function ApprovalBanner(props: ApprovalBannerProps): JSX.Element;
```

## ConsentBadge




Consent state for a student-owned item: private, shared (with recipient and expiry), expired, revoked, or consent required. Always glyph + words.

```
<ConsentBadge state="shared" recipient="Advisor Lee" expires="31 Dec" onManage={open} />
```

PROPS

```
import * as React from 'react';
export interface ConsentBadgeProps { state?: "private" | "shared" | "expired" | "revoked" | "required"; recipient?: string; expires?: string; onManage?: () => void; }
export declare function ConsentBadge(props: ConsentBadgeProps): JSX.Element;
```

## ErrorSummary





Summary of form errors at the top of a form (WCAG 3.3.1). Each item links to and focuses its field by id. Move focus to the summary on failed submit.

```
<ErrorSummary ref={r} errors={[{ field: "email", message: "Enter a full email address" }]} />
```

PROPS

```
import * as React from 'react';
export interface ErrorSummaryProps { errors: { field: string; message: string }[]; title?: string; }
export declare const ErrorSummary: (props: ErrorSummaryProps & { ref?: any }) => JSX.Element | null;
```

## HealthBadge





Health band for a tenant, integration or customer: band + optional score + top driver + freshness. Explains, never just colours.

```
<HealthBadge band="watch" score={68} driver="Activation below plan" updated="2 h ago" />
```

PROPS

```
import * as React from 'react';
export interface HealthBadgeProps { band?: "healthy" | "watch" | "atrisk" | "unknown"; score?: number; driver?:
string; updated?: string; }
export declare function HealthBadge(props: HealthBadgeProps): JSX.Element;
```

## PageHeader

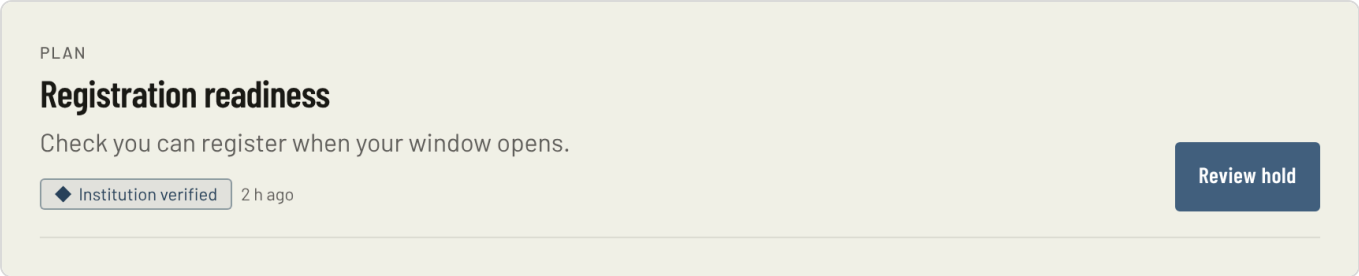



The universal page head from the UI grammar: kicker, one H1, one line on what the page helps you do, source/freshness, and at most one primary action.

```
<PageHeader kicker="Plan" title="Registration readiness" purpose="Check you can register when your window opens." source={<SourceBadge source="official" updated="2 h ago" />} actions={<Button variant="primary">Review hold</Button>} />
```

PROPS

```
import * as React from 'react';
export interface PageHeaderProps { kicker?: string; title: string; purpose?: string; source?: React.ReactNode; actions?: React.ReactNode; }
export declare function PageHeader(props: PageHeaderProps): JSX.Element;
```

## PolicyBadge





Names the policy that governs a fact, action or AI answer: name, version, owner. Clickable when onOpen is set (opens the policy text in a Sheet).

```
<PolicyBadge name="Registration policy" version="4.2" owner="Registrar" />
```

PROPS

```
import * as React from 'react';
export interface PolicyBadgeProps { name: string; version?: string; owner?: string; onOpen?: () => void; }
export declare function PolicyBadge(props: PolicyBadgeProps): JSX.Element;
```

## SupportHandoff

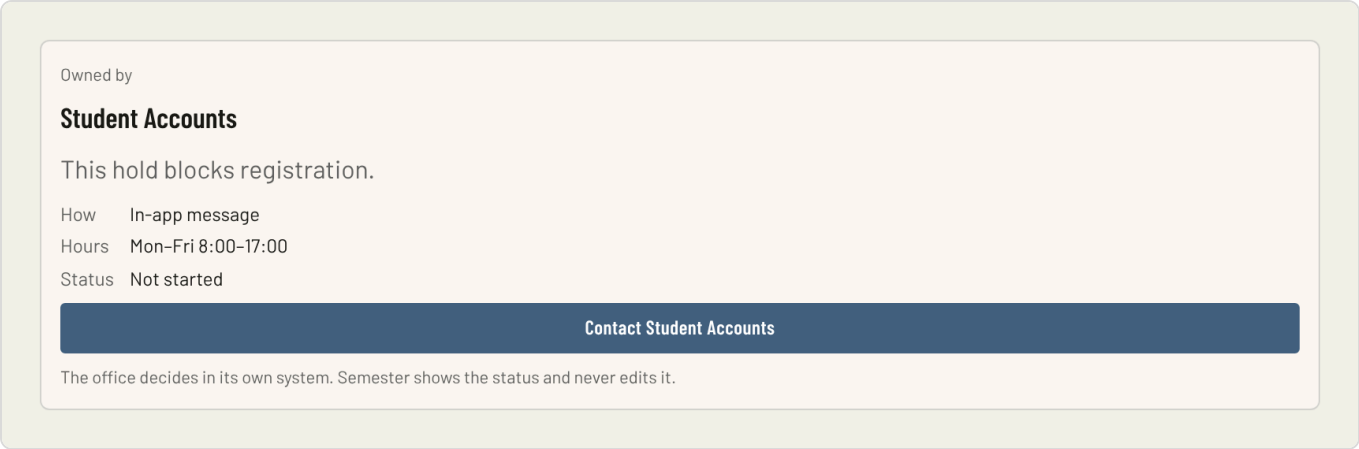


Official hand-off to the owning office (holds, aid, accommodations, counseling). Names the owner, the channel and hours, and tracks status without editing the official record.

```
<SupportHandoff office="Student Accounts" reason="This hold blocks registration." channel="In-app message" hours="Mon–Fri 8–5" onStart={go} />
```

PROPS

```
import * as React from 'react';
export interface SupportHandoffProps { office: string; reason?: string; channel?: string; hours?: string; status?: "ready" | "sent" | "received" | "resolved"; reference?: string; onStart?: () => void; }
export declare function SupportHandoff(props: SupportHandoffProps): JSX.Element;
```

# Patterns

## AI answer anatomy

Label · scope · sources · uncertainty · cost · policy · human-confirmed action

✦AI-assistedWritten with Semester’s assistant. It is not an official answer — check anything you act on.Semester assistant§Outlining allowed in BIO 210

About 3 hours remain on Lab report 31. Results is the largest gap2.

1. 1BIO 210 Syllabus §4◆Institution verifiedConfirmed by your institution’s own system.
2. 2Your lab notes, Oct 1○Student enteredYou typed this in. Semester has not checked it with your institution.

1. Always labelled AI-assisted — never a persona
2. Allowed data scope, named
3. Numbered sources with their own provenance
4. Confidence stated, and what it can’t know
5. Request cost and remaining allowance
6. Course/institution policy that applies
7. Consequential actions open a preview first

## Provenance ladder

Strongest first; stale ranks below yours on purpose (lib/where.ts)

| | | |
|---|---|---|
| 0 | ◆Institution verifiedConfirmed by your institution’s own system. | Your institution’s own record, read from its system. |
| 1 | ⇄ConnectedSynced from a connected account or feed. Semester has not checked it with your institution. | From a calendar or account you connected, checked recently. |
| 2 | ○Made hereSemester built this from sources you gave it — a rule-based extraction, not an AI draft. | The app built this from sources you gave it. |
| 3 | ○Student enteredYou typed this in. Semester has not checked it with your institution. | You entered this yourself. Nothing has checked it. |
| 4 | ○SampleIllustrative data. Not live. | Shipped as a demonstration. Not your semester. |
| 5 | !Unavailable or staleSemester cannot confirm that this information is current. | From a connection not checked lately. It may have moved. |

## Source Line

Signature device — a statement, a rule, its source. Only where a real source exists

You need 26 more credits to graduate.

The chip carries the word; the brass/editorial line is reinforcement only. Never decorative — absent source, absent line. Works on screens, decks, social cards and reports.

## Consent & sharing

One decision at a time · default private · visible history · revoke anywhere

ASK

Share final grades with Jonas?

Course letter grades once posted by the Registrar. Not assignment scores, feedback or anything else.

Share final grades | Not now

OnFinal grades · shared since Aug 28

SHOW WHAT HAPPENED

1. Jonas viewed final grades
   Guardian · Sep 30 · 08:02
2. You turned on Final grades
   You · Aug 28 · 16:40
3. Invitation accepted
   Jonas Lindqvist · Aug 28 · 16:31

## Consequential action

Review → preview → confirm → receipt. Reversible work gets Undo instead

### Withdraw from CHEM 101?

**CHEM 101 · Section 03**

What happens
: You leave CHEM 101 and a W is recorded on your transcript.

What stays the same
: Your other courses and aid status (13 credits, full-time) stay as they are.

Taking it back
: This can’t be undone. Ask the Registrar if this was a mistake.

Subject to your school’s official records.

RULES

· Name the object in the title and both buttons.

· Focus lands on the safe choice.

· Destructive = red ink + hairline, never a red fill.

· State recovery: undo · on request · can’t be undone.

· Financial and record changes always preview.

AFTER

✓Withdrawn from CHEM 101

A W is recorded. Your schedule is now 13 credits.

## State matrix

Every data region designs all seven states

LOADING

Loading this screen…

EMPTY

No tasks this week

Add a task

PARTIAL / STALE

**Housing**Room data may be 6 hours old.

OFFLINE

⊘You are offline. You can keep working — 2 changes will sync when you are back.

ERROR

!Canvas didn’t answer

Your draft is safe.

Retry

PERMISSION

⊙Only your advisor can edit this

Set by the Registrar.

SUCCESS

✓Registration submitted

Next: Review your spring week

# Guidelines

## Provenance and trust

Source: `docs/TRUST-CUES-AND-SOURCE-PRESENTATION.md`, `app/src/lib/where.ts`, `lib/status.ts`, `lib/source.ts`.

### The ladder (strongest first)

| Rank | Key | Word | Sentence |
|---|---|---|---|
| 0 | official | Official / Institution verified | Your institution's own record, read from its system. |
| 1 | connected | Connected | From a calendar or account you connected, checked recently. |
| 2 | made | Made here | The app built this from sources you gave it (rule-based extraction). |
| 3 | personal (yours) | Yours / Student entered | You entered this yourself. Nothing has checked it. |
| 4 | sample | Sample | Shipped as a demonstration. Not your semester. |
| 5 | stale | Out of date | From a connection not checked lately. It may have moved. |

Display-only kinds: **AI-assisted, source-linked** (a model's draft), **Estimated** (Semester's arithmetic), **Needs review**, **External**.

- `stale` ranks below `yours` on purpose: an unchecked copy of something that may have moved is worth less than a guess that knows it is a guess.
- `made` ≠ `ai`. An extraction can misread; a draft can be wrong while sounding right. Different glyphs (○ vs ✦), different sentences.
- Estimates and AI are styled to be **noticed** (amber/violet wash) — the opposite of "official looks louder", because they are what students over-trust.
- Never claim `official` for anything the institution did not send.

### Where cues go

1. The eyebrow or state row of an ObjectCard / ContextBar — never louder than the primary action.
2. A SectionLabel aside (`<SourceBadge>` beside "Released grades").
3. The **Source & details** sheet: Origin · Freshness · Used in · Who can see this · Limitations · Report incorrect information.
4. Charts: by pattern (solid / outline / hatched / dotted), plus a source line and "Illustrative demo data" when applicable.

### Rules for new work

1. Say a state through `SOURCES` / `STATUSES` in `components/trust/vocabulary.js`; never hand-type "Official" or "Synced".
2. Anything with a source gets a Source & details route.
3. Anything a model drafted is `ai`, lists its sources and limitations, and is editable before it is kept.
4. Freshness is written as "Updated 3 days ago", or "Update time not recorded" — never "just now" for an unknown time.

## AI governance in the interface

Source: `docs/BRAND-PLATFORM.md` §6.1, `TRUST-CUES-AND-SOURCE-PRESENTATION.md` (AI presentation), `components/StudyStudio.tsx`.

**Stance:** assistive, source-linked, reviewable, interruptible. A tool, not a person. Name: **Ask Semester**. No human name, avatar face, sparkle orb or "I" in marketing.

### Every AI answer shows (AIResponse)

1. The label **AI-assisted** (violet chip, ✦) — always, wherever it speaks.
2. **Allowed data scope** ("Allowed to read BIO 210 materials, Your calendar"). The student can change scope before asking.
3. **Numbered sources** with their own provenance chips; inline `.ai-cite` markers.
4. **Confidence** and what it can't know ("time estimates are mine, not your instructor's").
5. **Request cost** and remaining allowance.
6. **Policy** that applies (course AI policy set by the instructor; institution switches).
7. **Actions** — anything that writes, sends, shares, pays or registers opens Dialog + ActionPreview first.

### Show the work

Use StepStatus ("Reading sources → Drafting → Matching quotations → Ready"), marking the step that failed. Never fake an instant, certain answer. No shimmer, no typing animation.

### Words

Say: "Ask Semester drafts a plan from the sources you gave it. Review it before you use it." · "It can be wrong. Check the source linked beside each answer." Never: "AI-powered", "intelligent", "knows you", "accurate", "no hallucinations", "handles it for you", "Ask anything".

### Course policy

When an instructor restricts AI (e.g. outlining only), show it on the course workspace (object card "Course AI policy · set by instructor") and as a policy chip on every answer in that course; disable the disallowed actions with a reason rather than hiding them.

## Consequential actions

Source: `components/unity/ActionPreview.tsx`, `enrollment/StudentRegistration.tsx`, `console/Approvals.tsx`.

| Kind of action | Pattern |
|---|---|
| Reversible, personal (archive, move, rename) | Do it, then **UndoToast** ("Task archived. Undo"). No dialog. |
| Leaves Semester or someone else sees it (share, send, submit) | **Dialog + ActionPreview**: What happens / Exactly what / What stays the same / Taking it back |
| Academic record (enroll, drop, withdraw, regrade) | Two-step **Review → Confirm** in place; state where the request will land ("number 3 in line"; "a W is recorded") |
| Financial (pay, refund, waive) | Dialog + ActionPreview naming amount, method, processor ("Semester does not process the payment; TouchNet does"), refund route |
| Institutional high-risk (release hold, change role, break-glass) | **Two-person duty**: request → approve (≠ requester) → act; MFA fresh within 15 min; audit event written first |

### Writing the dialog

- Title is a question naming the object: "Drop CHEM 101?"
- Buttons name the outcome: "Keep CHEM 101" / "Drop — confirm". Focus lands on the safe one.
- Destructive uses red ink + red hairline (`variant="danger"`), never a solid red fill.
- Recovery is required: `undo` · `request` (with how) · `none` (with what to do if it was a mistake).
- Afterwards: a SuccessState receipt with what changed and "Next:" — never "All set!" while anything is pending.

## Consent, sharing and family access

Source: `components/unity/Visibility.tsx`, `AdvisorMeeting.tsx`, brief §5 (Family and Guardian Portal).

- **Default private.** Guardians, advisors and classmates see nothing by default. Never imply default guardian access.
- **One decision at a time.** Each ask states what, with whom, why, for how long, and how to undo. Decline is equal weight.
- **The same question everywhere:** VisibilityPicker — Only me · Course · Selected collaborators · Public portfolio. Offer only the audiences the module can honour.
- **Show exactly what leaves.** Before a share, preview the payload ("will see exactly this, as 'Maya Lindqvist', until 5 Nov 2026"). Private notes are never shared or exported.

- **Expiry and revoke.** Shares end when the student says; revoke and delete live next to every share.
- **Access history.** DecisionTrail of who viewed what, when. Students see when a share was opened.
- **Protected categories** (counseling, health, disability services) are never shareable automatically; show the switch disabled with the reason.
- **Guardian register:** the consent boundary is the hero of the screen — what's shared, since when, by whose choice.

---

# Institutional surfaces

Source: `components/console/*`, `institutional/*`, brief §4.

- **Context first.** Every console page opens with Environment (word + shape: ◆ Production), Scope, Operator, Role (grants), MFA freshness, Session, Support access. Staff workspaces carry a scope bar: Role · Scope · Signed in · "Every record view is logged".
- **Tables over cards** for anything compared across rows (integrations, audit, requests). Caps headers, hairline rows, tabular numerals, mono for IDs and correlation ids.
- **Fields** (label/value dl) for a single record.
- **DecisionTrail** for anything with authority: who, when, under which grant.
- **Errors separate cause classes:** retryable failure vs permission vs configuration. Name the system and the consequence for students ("Students see a stale label on Housing").
- **Implementation honesty.** Use "Planned", "Pilot", "Preview" chips beside the capability — never a roadmap presented as live.
- **Authority scope is always visible** for faculty and advisors (Can see / Can approve / Cannot). No copy suggests the tool judges staff or ranks students.

---

# Accessibility contract

Target WCAG 2.2 AA (a design requirement, not a conformance claim).

---

## Contrast — measured against every surface of a ground, not the flattering one

| Element | Requirement |
|---|---|
| Body / UI text | ≥ 4.5:1 |
| Large text (≥24px or ≥18.66px bold) | ≥ 3:1 |
| Icons, borders, focus, chart marks | ≥ 3:1 vs neighbour |
| Tertiary ("faint") ink | metadata only, never information a student must act on |
| Brass | base stop on dark only; shade stop (#695a33) for text on light |

### Structure & input

- One `main`, one visible H1, skip link; heading levels describe structure.
- Keyboard order follows reading order; focus never lands under sticky chrome (scroll margins 96 / 84px).
- 44px ordinary targets; 24px floor only in crowded composites with keyboard parity. Icon-only controls always named.
- Native inputs; persistent labels; hints and errors associated via aria-describedby; errors preserve input.
- Overlays: focus trap, Escape, outside dismissal, focus return; triggers report aria-expanded.

### Never colour alone

Every state: glyph + word + tone. Provenance origin has a second carrier in fill (solid / outline / dashed); forced colours thicken the solid chip's border to 3px.

### Reader settings the tokens respond to

Text size 0.94–1.18× (`--text-scale`) · Density 1 / .86 / .74 · Line height 1.35–1.95 · Letter/word spacing · Reading width 52–82ch · Body face incl. Atkinson Hyperlegible · Motion: Follow device / Less motion / Low stimulation (also removes gradients, shadows, quieter badges) · Increase contrast raises faint/dim/hairline alphas · 13 grounds + Match my device.

### Motion

All roles zero under reduced motion and `data-calm`. No essential meaning depends on motion. No flashing, no parallax, no looping decoration, no countdown theatre.

### Brand-exempt zones

Status/warnings, provenance, consent text and accessibility controls: body-grade type only (never Cinzel), never restyled by tenants, campaigns or themes, never animated away or hidden behind hover.

## Layout and responsive behaviour

| Tier | Width | Navigation | Page pad |
|---|---|---|---|
| Compact | < 760px | Labelled bottom TabBar: Today · My Path · Search · Plan · Me | 18px |
| Medium | 760–1099px | Compact rail (72px, icons + tooltip names) | 20px |
| Wide | ≥ 1100px | SideRail 248px (272 at very wide) with group labels | 30px |

- **Shell:** SideRail (Ink) │ SystemContextBar (44px: location · term · ⌘K · sync · tools) over a scrolling page.

- **Page:** pagehead (kicker · H1 · one-line purpose · ≤2 actions) → `cols` grid `minmax(0,1.6fr) minmax(300px,1fr)` → main column leads with the next action; aside holds "Needs you", context, policy. Stacks to one column under 1000px.
- **Measures:** reading 66ch; operational content ≤ 1180px.
- **Tables** keep row identity and the first action on compact screens; the table region scrolls, not the document.
- **Five canonical destinations** are the spine: Today, My Path, Search, Plan, Me. Specialist tools open in context (OpenIn), never as a sixth global product.
- **Workspace modes** (presentation only): Guided · Focused (navigation steps back, FocusBar is the way out) · Detailed (source sentences up front) · Accessibility.

---

# Content templates

From `docs/BRAND-PLATFORM.md` §7.

**Status sentence** — what is true → what it means for you → what you can do.

> "Your Canvas calendar hasn't updated since Tuesday. Deadlines below may have moved. Reconnect it, or check the course page."

**Empty state** — why it's empty + one action. "No grades released yet. Your instructor has not released any BIO 210 grades for Fall 2026. Grades appear here once they do." [Work out what you need]

**Error** — what failed, what's safe, the way out, a reference. "Canvas didn't answer. Your draft is safe on this device." [Try again] [Use Canvas directly] Reference: SYNC-4F2A

**Success** — acknowledge, then Next. "Registration submitted. Next: review your spring week."

**Permission change** — what changed, why, who controls it, where to change it.

**Incident** — Status · What is affected · What is NOT affected (only if verified) · What it means for you · What you can do now · What we know / don't know · Next update (only if operations can keep it). Never "minor", "isolated", "out of an abundance of caution".

**Onboarding** — "Semester starts with what you have. Pick one: add a syllabus, connect a calendar, or use sample data." → first real next step with its source label → consent one at a time → no streaks, no points, Skip always available.

**Dates** — "Thu 9 Oct · 23:59" in UI; "3 Oct 2026" in documents. Always unambiguous; time zone when it crosses one.

# Architecture and tooling

## Maps of the whole

Master control, catalog, role lens — how the pieces point at each other

### Master control

ui_kits/master-control/ — product, console & back end, business OS, company site, design system & engineering

Rule
Every new file is linked here

### Master catalog

51 roles · 673 screens · 319 workflow steps (17 workflows) · 88 systems · 82 docs

Rule
Status from evidence: code, tests, release

### Role lens

64 screens × 14 roles: rendering, sources, tables, RLS, API

Access levels
full · scoped · shared · read · audited · none

**Rule:** company roles (investor, CS, RevOps) never see student records. Role model in roles.js is design-level; verify against migrations.

## Stack layers

Front end → middleware → API → database, with the rule for each

### Front end

Student app
Five destinations, 64 screens

Staff + console
Same shell, role-scoped routes

Design system
Tokens → semantic CSS → components

Offline
Queue mutations, replay on reconnect

### Middleware

Auth proxy
Refresh session; reject expired

Tenant resolver
Host/SSO → tenant_id on every request

Capability check
role × screen × grant first

Audit writer
Event written before the action runs

### Server / API

Query RPCs
api.* reads of read models

Commands
private.* fns; idempotency key

Integrations
LTI 1.3, OneRoster, SIS read, SAML

AI gateway
Scope, policy, citations, spend log

### Database

Supabase Postgres
RLS on every table

tenant_id
On every row

private.*
Authoritative, never exposed

read_model.*
Projections + version + freshness

## Read-model pipeline & freshness

Write → outbox → projection → refetch; lag decides what the UI allows

WRITE → READ

| 1 write | | 2 outbox | | 3 project | | 4 stamp | | 5 invalidate | | 6 signal | | 7 render |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Authoritative write | → | Event, same transaction | → | Worker applies, idempotent | → | Version + freshness | → | Cache namespaces | → | Targeted refetch | → | Server read model |

FRESHNESS → UI POLICY (FRESHNESS.TS)

| State | Lag | Display | Consequential actions |
|---|---|---|---|
| Live | ≤ 5 s | Normal | Allowed if approvals satisfied |
| Recent | ≤ 60 s | Normal | Normal guardrails |
| Delayed | > 60 s | Delay badge + age | Re-check source first |
| Failed / Rebuilding | — | Last good + notice | Held |

## AI gateway

Six checks between a question and an answer — student records never leave

| Request | | Identity + scope | | Policy | | Routing | | Answer | | Evidence |
|---|---|---|---|---|---|---|---|---|---|---|
| Student, staff or institution asks | → | Who; which data they may read | → | Course AI policy, institution switches, FERPA boundary | → | Approved model per task; search, calendar, materials | → | Labelled AI-assisted, sources, confidence | → | Citations, cost, outcome logged |

## Environments

Local, staging, production on Vercel + Supabase — data never crosses

| Environment | Hosting | Data | Access |
|---|---|---|---|
| Local | Supabase CLI + Next.js dev | Synthetic seed | Engineers |
| Staging | Vercel preview + Supabase staging | Synthetic + institution test IdP accounts | Engineers, institution IT testers |
| Production | Vercel production + Supabase production (separate keys) | Real student records under the DPA | Named operators, MFA, access logged |

**Rule:** no copying data between environments; secrets set per environment. Cutover steps: docs/launch/Cutover Plan.html

## Document library by stream

docs/ — what exists per stream and what is next

| Stream | Built | Next |
|---|---|---|
| Brief | One-pager, FAQ, role sheets, overview deck | Real screenshot on slide 4 |
| Guides | Architecture, developer, user | Admin manual, tutorials |
| Launch | Runbook, cutover plan, day-1/week-1 support | — |
| Secure | 10 policies; HECVAT, SOC 2, pen test, insurance readiness | Stream index |
| Legal (drafts) | Terms, privacy, community, subprocessors | MSA, order form, DPA, cookie, accessibility |
| Build | — | Engineering playbook, QA and accessibility test plans |

**Rule:** formal documents are doc_page files under docs/<stream>/, linked from docs/index.html. Legal stays draft until attorney review.

## semester-core

Workflow decision logic as pure TypeScript — handoff/semester-core/

| Module | Decides | Rendered by |
|---|---|---|
| provenance.ts | Source rank, conflicts, freshness label | SourceBadge, ProvenanceChips |
| nextaction.ts | Order of a student's next actions | Today, NextSteps |
| access.ts | Role × screen, share expiry, break-glass | Role lens, route guards |
| freshness.ts | Lag → display / safe / destructive | Read models, lag simulator |
| consequence.ts | Undo / preview / two-person | Dialog, ActionPreview |
| aigateway.ts | Scope + policy before any model call | AIResponse |
| approvals.ts | Two-person duty state machine | Console approvals |
| scoring.ts | Weighted 0–5 grading | Workflow lab |
| pilot.ts | Launch readiness | Business gap analysis |

No dependencies, no I/O, vitest proof per module. Files end in .txt; strip on copy to app/src/lib/core/.

## semester-platform

Migrations 010–040 with RLS, API routes and tests — handoff/semester-platform/

| 010 Core | 020 Community | 030 Market | 040 Ops |
|---|---|---|---|
| core.institutions, core.profiles, audit.events | groups, members, posts, reports, events, rsvps | listings, offers, drops, bids | staff, accounts, invoices, social_posts, settings |

supabase/migrations
*.sql.txt → .sql

→

app · lib
validation, 2 API routes

→

tests
RLS + unit

→

npx supabase db reset
then npm test

**Status:** written to the architecture guide. Not yet run, typechecked or tested.

## AI Workflow Router & Benchmark Lab

Prototype in ui_kits/workflow-lab/ → production source in handoff/workflow-router-app/

### Prototype · ui_kits/workflow-lab/

Router
6 inputs → tool, confidence, reasons, limits, escalation, prompts

Matrix
16-column feature matrix, 12 canonical workflows

Benchmark
Persistence tests, 0–5 grading, weighted /5 and /100, leaderboard, CSV/MD export

Saved on this device only; labelled prototype mode.

### Production · handoff/workflow-router-app/

Stack
Next.js App Router, TypeScript strict, Tailwind, Supabase (@supabase/ssr, magic link), Zod, Server Actions

Data
001_core_workflow_router, 002_benchmark_grading; org-scoped RLS (owner · admin · member · viewer); seed with 12 workflows

Tests
vitest suites, RLS test plan

Run install.sh. Not yet typechecked, linted, tested or built.

## Claude Code toolkit

Token pipeline, files and commands — handoff/claude-code-toolkit/

| lib/look.ts | → | styles/tokens.css | → | lib/tokenexport.ts | → | semester.tokens.json | → | FIGMA-MAPPING.md |
|---|---|---|---|---|---|---|---|---|
| tokensFor — every value | | semantic names | | buildTokenExport | | generated · never hand-edit | | Figma variables · checked |

ADDS TO THE REPO

.claude/skills/audit-semester-design-sync/ read-only audit

.claude/skills/build-semester-ui/ build rules

.mcp.json Figma remote MCP

docs/FIGMA-MAPPING.md parity table

app/scripts/design-system-audit.mjs 4 checks

app/scripts/design-system-report.mjs CI markdown

app/src/lib/designsystem.test.ts proves each check

RUN

```
claude mcp add --scope project \
  --transport http figma https://mcp.figma.com/mcp
/audit-semester-design-sync app/src
cd app && npm run design-system:check
```

No new dependency, token source, Tailwind, Storybook or package.